



*Commercial
size bin
unloading
equipment
for a variety
of grains.*

Series II Sweeps



**"Your Complete
Systems
Manufacturer."**

GSI is Revolutionizing the Commercial Sweep Industry.


GSI is revolutionizing the commercial sweep industry with its Portable Control Panel and Knock Down Sweep. Solid, heavy-duty construction, engineered for efficiency and designed to handle a variety of grains large and small. GSI Series II commercial sweeps provide reliable, year round operation with little maintenance and minimal chance for product contamination. Combined with the included NEMA 4 control panel, you won't find a more simple to operate sweep for your commercial grain delivery needs. Control features include a reversing switch, safety foot switch, and manual or automatic operation.




GSI is proud to be the first in the industry to offer a Portable Control Panel. This means you can use the same control box to control all of your same size sweeps. The control panel slips into a specially designed docking station located at each sweep location.




All Series II Sweeps have a Class II, Group F and G, motor that powers the heavy-duty helicoid auger flighting for years of reliable operation.

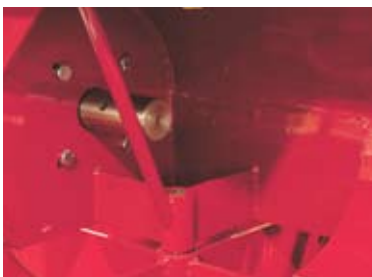

Optional Pivot Pin Support.
(Auger removed for illustration purposes.)

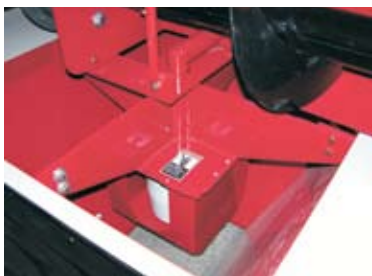

Optional Swivel Plate with Sump Kit.
(Collector Ring cut out for viewing purposes only.)

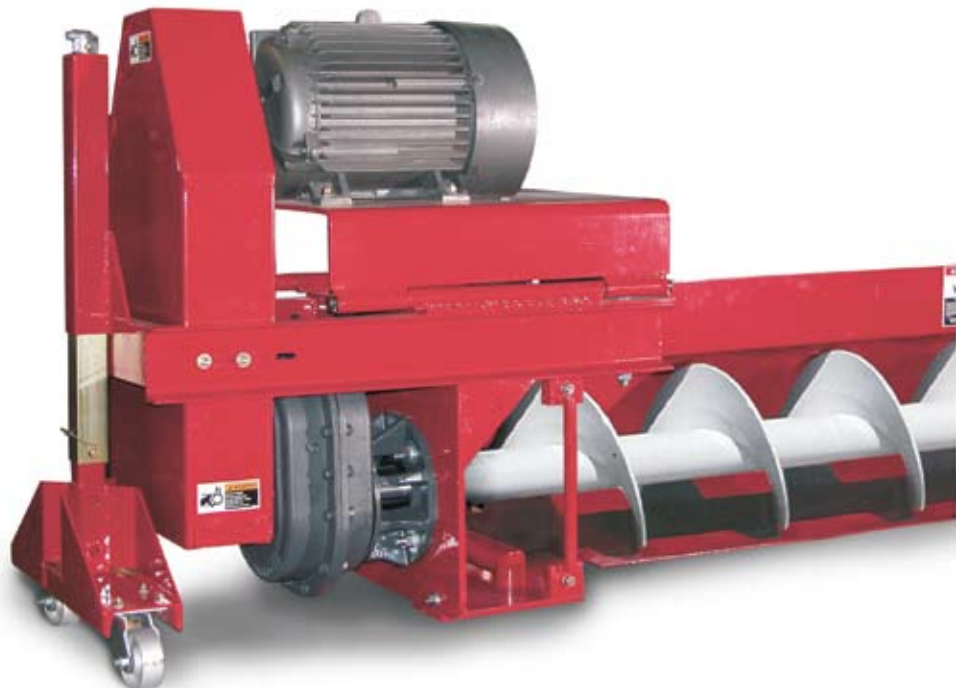

Series II Sweeps

Nylon hanger bearings mounted on 180° backshield supports the heavy duty helicoid auger fighting.



A belt driven Class II Speed Reducer is mounted to the sweep frame via a CEMA drive adapter. This gives the motor the extra power needed to easily sweep through the grain.



Center support wheels are made of durable plastic to reduce wear and help the sweep roll easily across the concrete floor.



Bearing Mount designed to withstand the rigors of commercial unloading and provide years of trouble free service.



A 1 to 3 HP C-Face drive motor turns two 23" traction tires set in dual configuration for additional power.



Optional track with textured surface for added traction.

GSI Knock Down Sweep

Introducing, the **GSI Knock Down Sweep**, uniquely designed for storage units with small doors. This sweep is broken into 10 main pieces that can fit through a door as small as 30 1/2" in diameter for 16", 27 1/2" in diameter for 12", or a 20" x 24" rectangular door. The components are then assembled inside the storage unit. This industrial quality, high capacity design can reduce cleaning time and manual labor costs.



Sweep Frame Inserted Into Pocket on Sweep Back.



Knock Down Sweep Frame Bolted Together.

Safety First

As with all large machinery with moving parts, it is especially important to follow all safety precautions and warnings when operating this equipment. Failure to do so could result in serious injury or death. Replacement warning decals and operation manuals are available free of charge.



Grain Systems

"Your Complete Systems Manufacturer"

1004 E. Illinois Street • Assumption, IL 62510
Ph: 217-226-4421 • Fax: 800-800-5329

Int'l Tel: 1-217-226-4401 • Int'l Fax: 1-217-226-3404

www.gsiag.com
E-mail: gsisaless@gsiag.com

Knock Down Sweep
Tractor Assembly.



Tractor Frame Bolted to Sweep Assembly.



Patent Pending

Bin Dia.	12" SERIES II SWEEP					16" SERIES II SWEEP				
	Drive H.P.	Bushel/Mt Per Hour Horsepower			Length Pivot to End	Drive H.P.	Bushel/Mt Per Hour Horsepower			Length Pivot to End
		5000/125	6000/155	7000/180			8000/205	9000/230	10000/255	
36'	1	7.5	7.5	7.5	16.79' (5.12m)	2	7.5	7.5	7.5	16.85' (5.14m)
37'	1	7.5	7.5	7.5	17.79' (5.43m)	2	7.5	7.5	7.5	16.85' (5.14m)
39'	1	7.5	7.5	7.5	18.79' (5.73m)	2	7.5	7.5	7.5	17.85' (5.44m)
40'	1	7.5	7.5	7.5	18.79' (5.73m)	2	7.5	7.5	7.5	18.75' (5.72m)
42'	1	7.5	7.5	7.5	19.79' (6.04m)	2	7.5	7.5	10	19.85' (6.05m)
43'	1	7.5	7.5	7.5	20.79' (6.34m)	2	7.5	7.5	10	19.85' (6.05m)
45'	1	7.5	7.5	7.5	20.79' (6.34m)	2	7.5	7.5	10	20.85' (6.36m)
48'	1	7.5	7.5	7.5	22.79' (6.95m)	2	7.5	10	10	22.85' (6.96m)
49'	1	7.5	7.5	7.5	22.79' (6.95m)	2	7.5	10	10	22.85' (6.96m)
51'	1	7.5	7.5	10	23.79' (7.26m)	2	7.5	10	10	23.85' (7.27m)
54'	1	7.5	7.5	10	25.79' (7.86m)	2	10	10	10	25.85' (7.88m)
55'	1	7.5	7.5	10	25.79' (7.86m)	2	10	10	10	25.85' (7.88m)
57'	1	7.5	7.5	10	26.79' (8.17m)	2	10	10	10	26.85' (8.18m)
59'	1	7.5	7.5	10	27.79' (8.47m)	2	10	10	15	27.85' (8.49m)
60'	1	7.5	7.5	10	28.79' (8.78m)	2	10	10	15	28.85' (8.79m)
62'	2	7.5	7.5	10	29.79' (9.08m)	2	10	10	15	29.85' (9.10m)
63'	2	7.5	7.5	10	29.79' (9.08m)	2	10	10	15	29.85' (9.10m)
66'	2	7.5	7.5	10	31.79' (9.69m)	2	10	15	15	31.85' (9.71m)
68'	2	7.5	7.5	10	32.79' (10.00m)	2	10	15	15	32.85' (10.01m)
69'	2	7.5	7.5	10	32.79' (10.00m)	2	10	15	15	32.85' (10.01m)
72'	2	7.5	7.5	10	34.79' (10.61m)	2	15	15	15	34.85' (10.62m)
75'	2	10	10	10	35.79' (10.91m)	2	15	15	15	35.85' (10.93m)
78'	2	10	10	10	37.79' (11.52m)	2	15	15	15	37.85' (11.54m)
80'	2	10	10	10	38.79' (11.83m)	2	15	15	15	38.85' (11.84m)
81'	2	10	10	10	38.79' (11.83m)	2	15	15	15	38.85' (11.84m)
84'	2	10	10	15	40.79' (12.44m)	2	15	15	15	40.85' (12.45m)
87'	2	10	10	15	41.79' (12.74m)	2	15	15	20	41.85' (12.76m)
88'	2	10	10	15	42.79' (13.05m)	2	15	15	20	42.85' (13.06m)
90'	2	10	10	15	43.79' (13.35m)	2	15	15	20	43.85' (13.37m)
91'	2	10	10	15	43.79' (13.35m)	2	15	15	20	43.85' (13.37m)
92'	2	10	10	15	44.79' (13.66m)	2	15	20	20	44.85' (13.67m)
95'	2	10	15	15	45.79' (13.97m)	2	15	20	20	45.85' (13.98m)
98'	2	10	15	15	47.79' (14.57m)	2	15	20	20	47.85' (14.58m)
105'	3	15	15	20	50.79' (15.48m)	3	20	20	20	50.85' (15.50m)
113'	3	15	15	20	54.79' (16.70m)	3	20	20	20	54.85' (16.72m)
120'	3	15	15	20	58.79' (17.92m)	3	20	20	20	58.85' (17.94m)

Due to continual improvements, GSI designs and specifications are subject to change without notice.

NOTE: Sweep drive and carrier wheels require plates or track over aeration flooring for travel, and supports not supplied with the sweep unit. Contact your installer or flooring provider for possible source and details.

GSI GROUP



GS14

Dec 2007

Copyright © 2007 GSI Group. All rights reserved.