


MOVE GRAIN GENTLY AND EFFICIENTLY

FIELD LOAD CONVEYOR

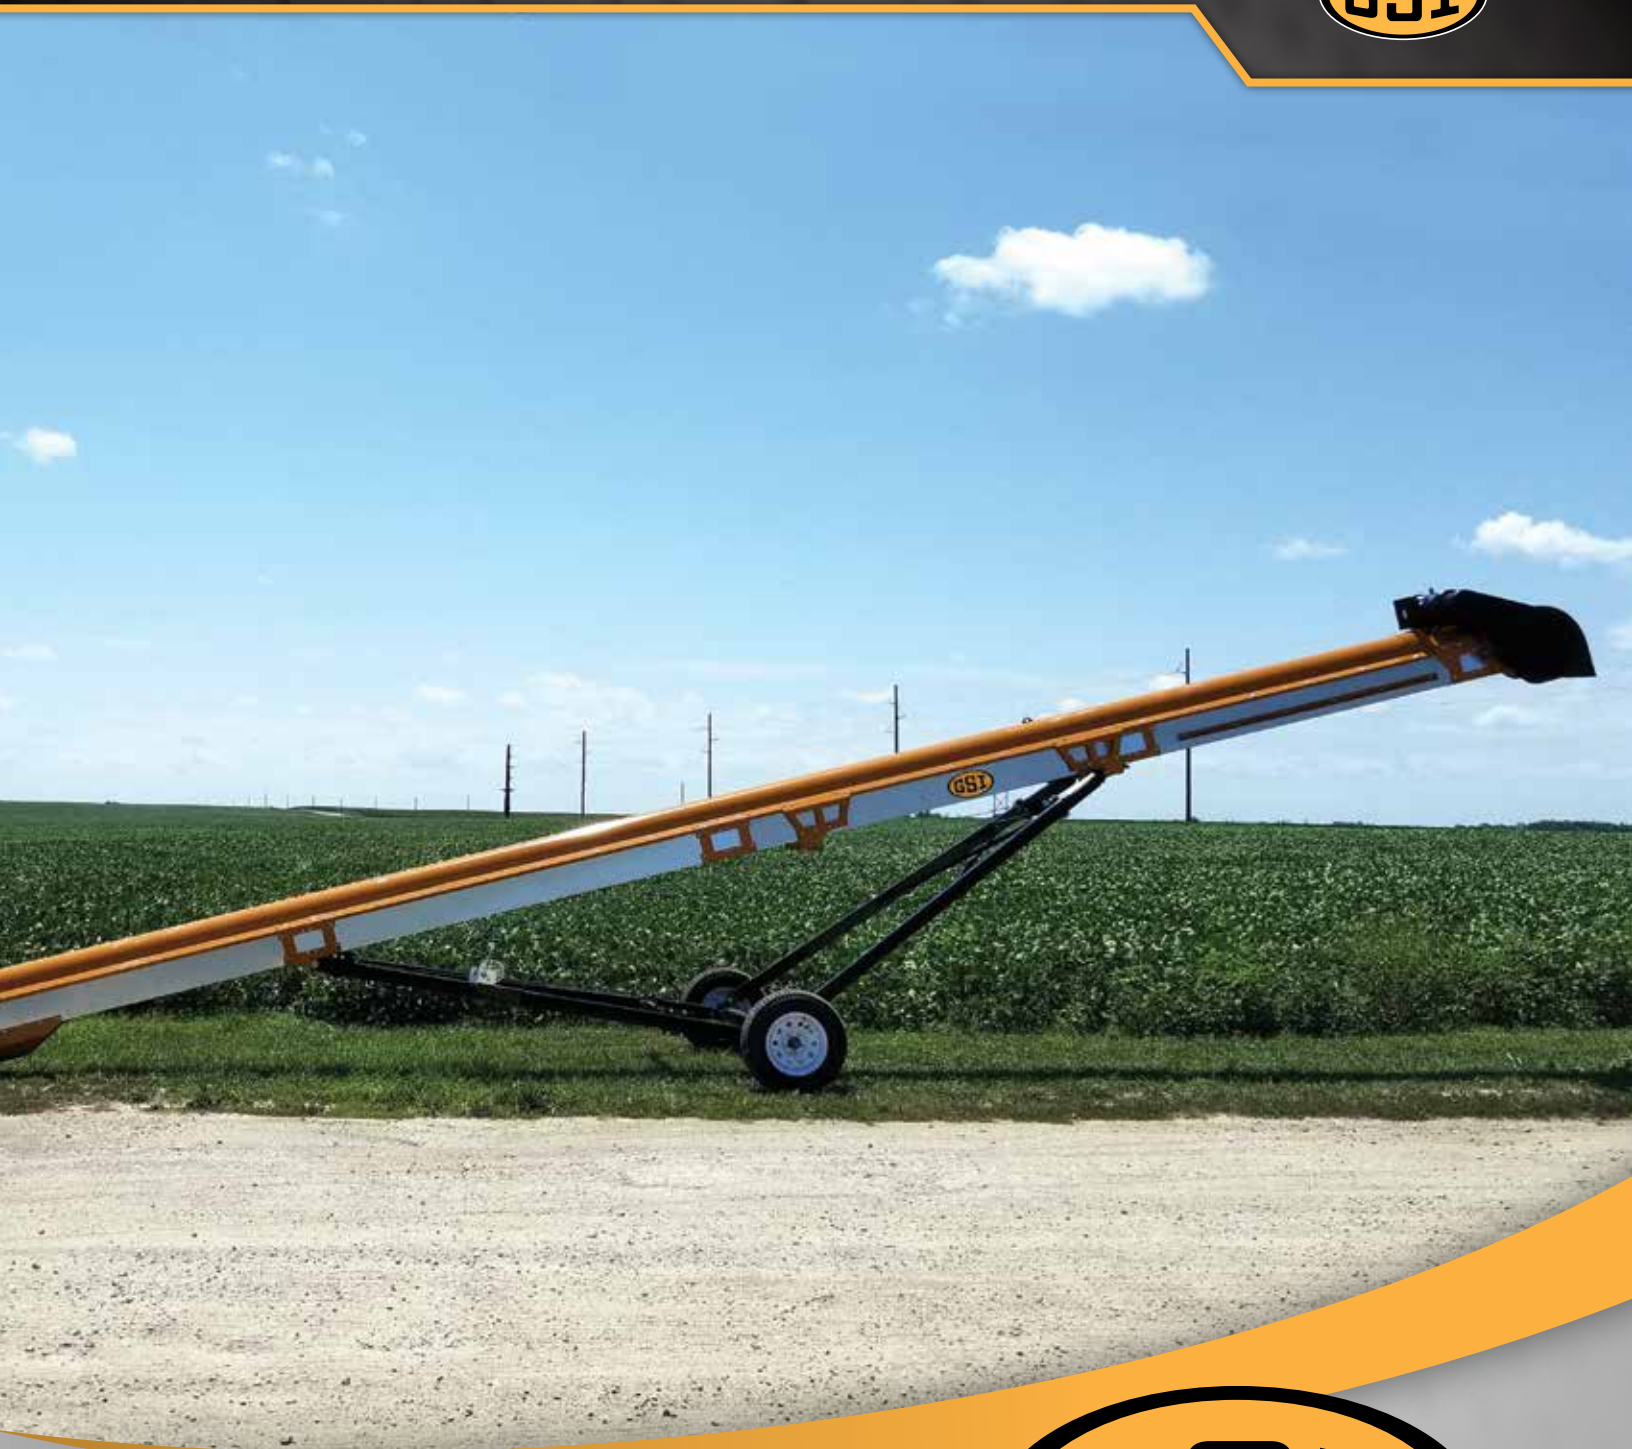

PROVEN & DEPENDABLE™

WWW.GRAINSYSTEMS.COM

FIELD LOAD CONVEYOR

WWW.GRAINSYSTEMS.COM

MOVE GRAIN GENTLY AND EFFICIENTLY

GSI Field Load Conveyors are available in 3 different models - lengths of 35', 40' and 45' - with capacities up to 6,000 BPH. Field Load Conveyors can be used for unloading a bin or emptying a truck. Electric or hydraulic drive options are available.



The 15" wide chevron-top belt moves grain through 12" tube.




Collapsible hopper standard.



Cleanout door at inlet for easy cleaning.

FIELD LOAD CONVEYOR DIMENSIONS

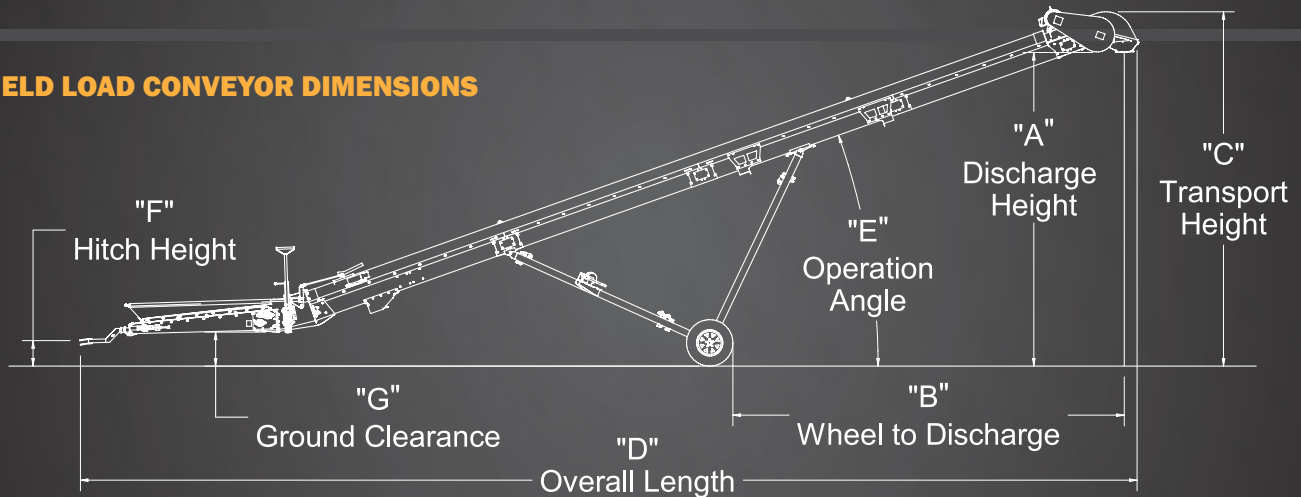

POSITION	MODEL	"A" DISCHARGE HEIGHT	"B" WHEEL TO DISCHARGE	"C" TRANSPORT HEIGHT	"D" OVERALL LENGTH	"E" OPERATION ANGLE	HOPPER HEIGHT	"F" HITCH HEIGHT	"G" GROUND CLEARANCE
Transport	1635	6'1"	16'3"	8'9"	43'	-	-	1'6"	9"
	1640	8'1"	13'4"	10'	47'9"				9"
	1645	8'10"	18'11"	11'4"	52'9"				9"
Standard Operation	1635	12'2"	15'5"	14'	41'3"	22°	21" 8" Collapsed	Removed	-
	1640	13'4"	14'4"	15'2"	46'2"	22°			-
	1645	15'5"	18'9"	18'3"	51'4"	22°			-
Maximum Operation	1635	17'3"	14'7"	19'2"	39'2"	30°	8" Collapsed	Removed	-
	1640	18'5"	14'1"	20'3"	44'2"	28°			-
	1645	19'6"	17'11"	22'2"	48'8"	28°			-

Capacities are reduced beyond 22°

**TO FIND YOUR LOCAL GSI DEALER,
VISIT THE GSI DEALER LOCATOR
AT WWW.GRAINSYSTEMS.COM**



Copyright ©2018 All rights reserved. GSI reserves the right to change designs and specifications without notice.

GS-045 SEPTEMBER 2019