



The lowest set of gusset brace plates on a tower must be replaced by the gusset brace plates (1) from the branding kit, which are powder coated GSI ochre.

NOTE: Refer to your print packet for gusset brace plate (1) part numbers and hardware (2 and 3) specific to your tower.


To Install:

1. In the base section of the tower, install the gusset brace plates (1) from the branding packet to the diagonal and strut tubes.

NOTE: Use the hardware (2 and 3) supplied with your tower.

2. Install the decal (4) to the center of each gusset brace plate (1).

NOTE: Make sure the plate (1) is clean and dry before installing the decal (4).

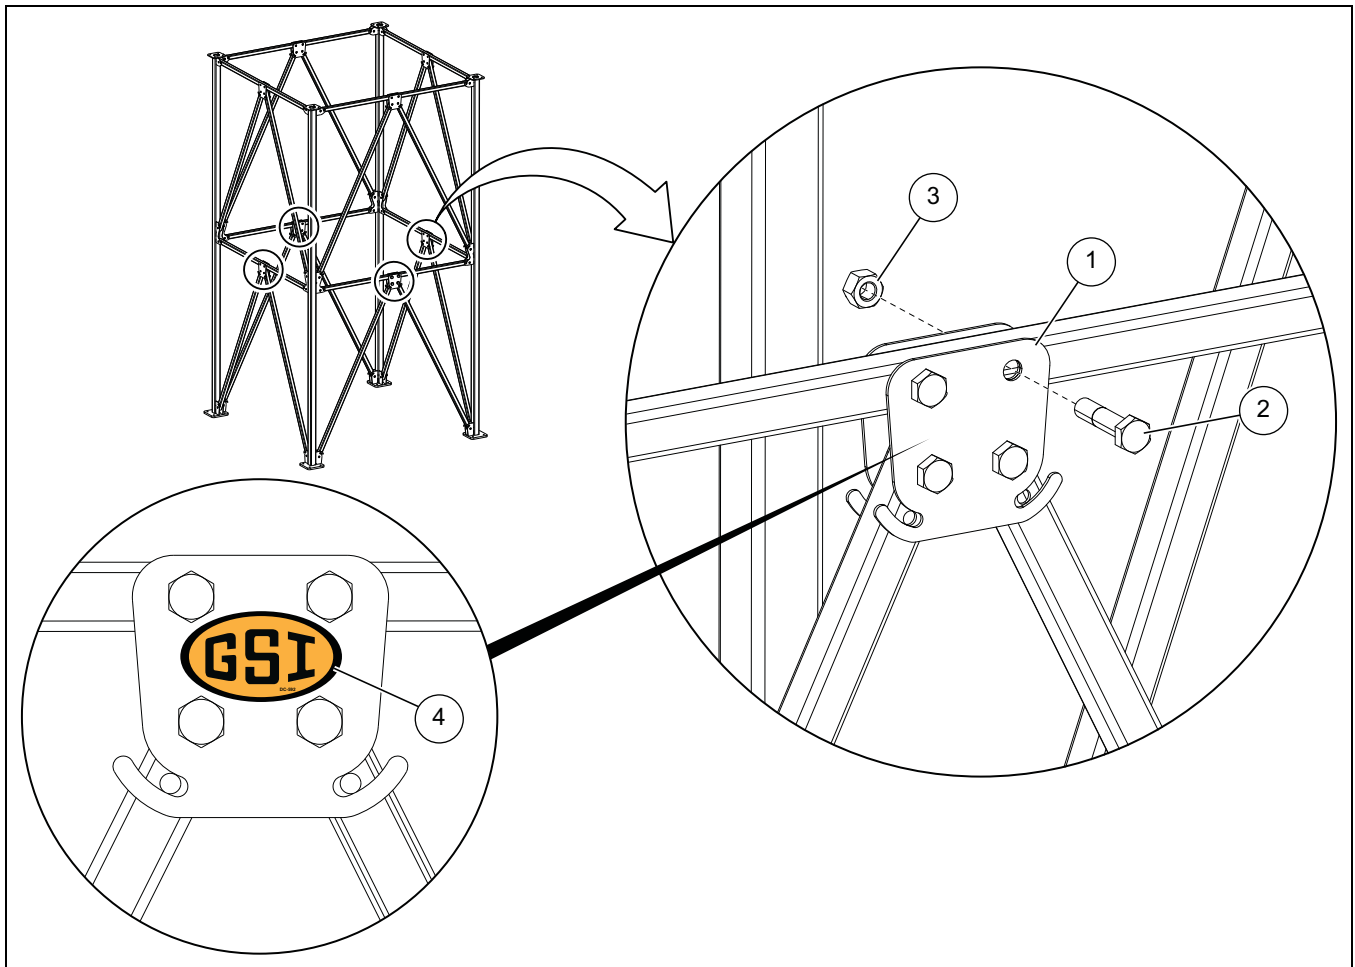

Ref #	Description
1	Gusset Brace Plate
2	Bolt

Ref #	Description
3	Nut
4	Decal (DC-592)

