
Bucket Elevator

Safety Cage and Rest Platform Series 2

Assembly Manual

PNEG-679

Rev. 2 6/5/01

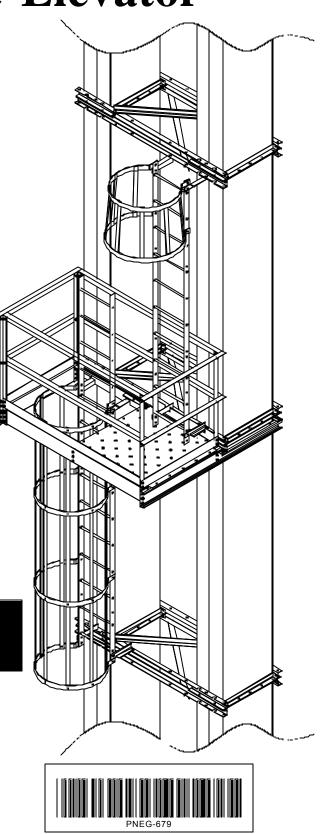

SAFETY GUIDELINES

This manual contains information that is important for you, the owner/operator, to know and understand. This information relates to protecting *personal safety* and *preventing*

equipment problems. It is the responsibility of the owner/operator to inform anyone

operating or working in the area of this equipment of these safety guidlines. To help you



This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all



DANGER indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury.



WARNING indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.



CAUTION indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

CAUTION


CAUTION used without the safety alert symbol indicates a potentially hazardous situation which, if

NOTE

NOTE indicates information about the equipment that


| Tie Angle Attachment 4 | |
|----------------------------------------------|---|
| Tie Angle and Cross Braces 5 | |
| Ladder Standoff Attachment 6 | |
| Ladder Attachment | |
| Safety Cage Hoop Assembly 8 | |
| Safety Cage Vertical Bar Attachment9 | |
| Safety Cage Flare Attachment | 0 |
| Elevator Ladder Arrangement | 1 |
| Rest Platform Assembly | 2 |
| Side Mounting Channels 1 | 3 |
| Platform Corner Post | 4 |
| Front and Rear Mounting Channels | 5 |
| Center Support Channel | 6 |
| Rest Platform Deck Plate 1 | 7 |
| Top & Mid Handrail | 8 |
| Kickplates | 9 |
| 14' Ladder Assembly at Rest Platform | 0 |
| 14' Ladder Assembly at Head Service Platform | 1 |
| 30" & 36" Rest Platform Part Specs | 2 |
| 30" & 36" Rest Platform Part Specs | 3 |
| 42" & 48" Rest Platform Part Specs | 4 |
| 42" & 48" Rest Platform Part Specs | 5 |
| Warranty2 | 6 |

Attach the up and down legs together with the tie angles. Position the tie angles as shown and fasten with the 1/2"-13x1" bolts.

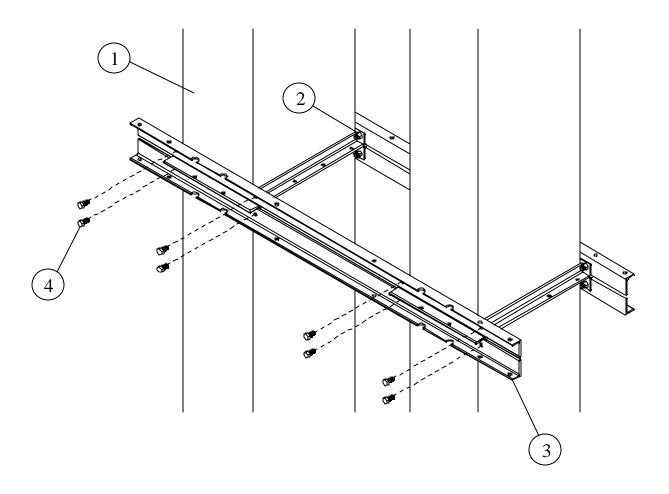


- 1. Trunking Section
- 2. 1/2"-13 Hex Nut
- 3. Tie Angle
- 4. 1/2"-13x1" Hex Bolt





BECT3011 36" Elevator Tie Angle



BECT4211 42" Elevator Tie Angle




BECT4804 48" Elevator Tie Angle




The 42" and 48" elevators have cross braces that brace the two tie angles diagonally. (one per pair of tie angles)

BECT4240 42" Tie Angle Cross Brace

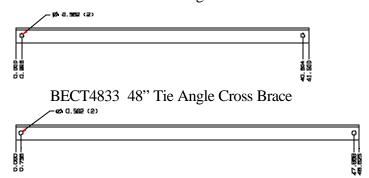


Attach the ladder standoff bracket to the tie angles.

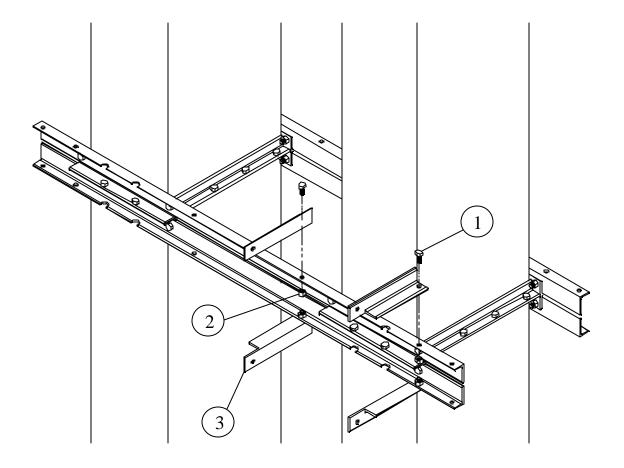

- 1. 1/2"-13x1" Hex Bolt
- 2. 1/2"-13 Hex Nut
- 3. Ladder Standoff Bracket Left- (be-plat1) Right- (be-plat2)

When attaching the ladder to the standoffs the ladder is attached through the second hole down front the end of the ladder. The first hole is for the safety cage hoop to attach through.

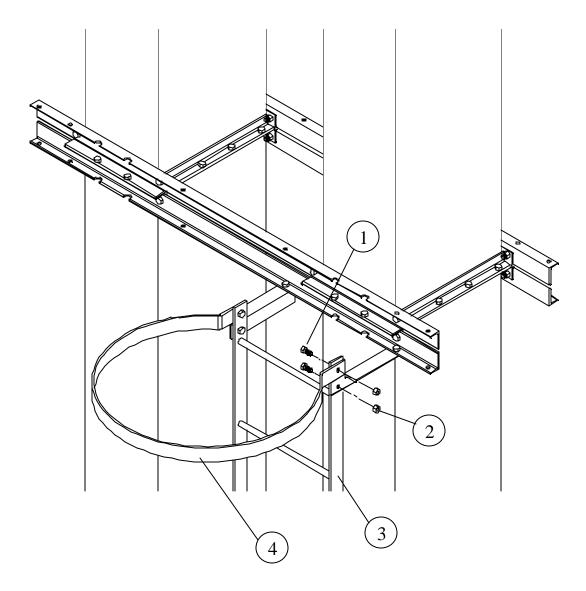


- 1. 1/2"-13x1" Hex Bolt
- 2. 1/2"-13 Hex Nut
- 3. 10' Ladder Section** (10foot)
- 4. 27" Safety Cage Hoop (27hoop)

** NOTE: A ten foot section is used at anytime the ladder continues on to another section of ladder.


A fourteen foot section is used anytime the ladder extends through any platform deck.

Bolt all safety cage hoops to ladder as shown below. Leave all bolts loose until the vertical bars are in place and then tighten all hardware.

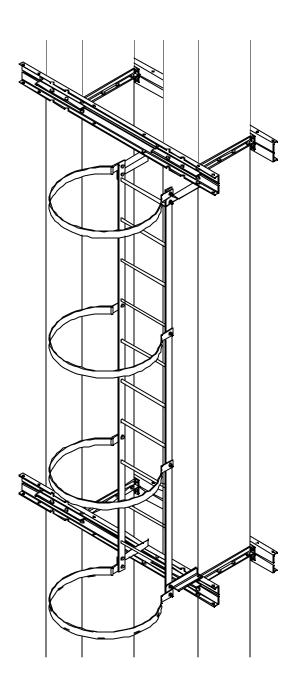


Bolt all safety cage vertical bars to the cage hoops as shown below.


Reference page 11 Safety Cage 10' Assembly

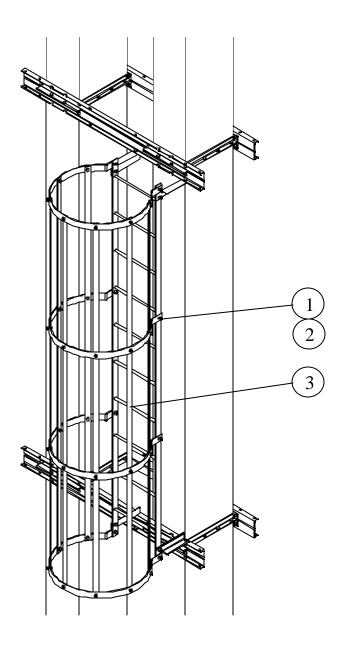


- 1. 1/2"-13x1" Hex Bolt
- 2. 1/2"-13 Hex Nut
- 3. Safety Cage Vertical Bar (10foot-v)

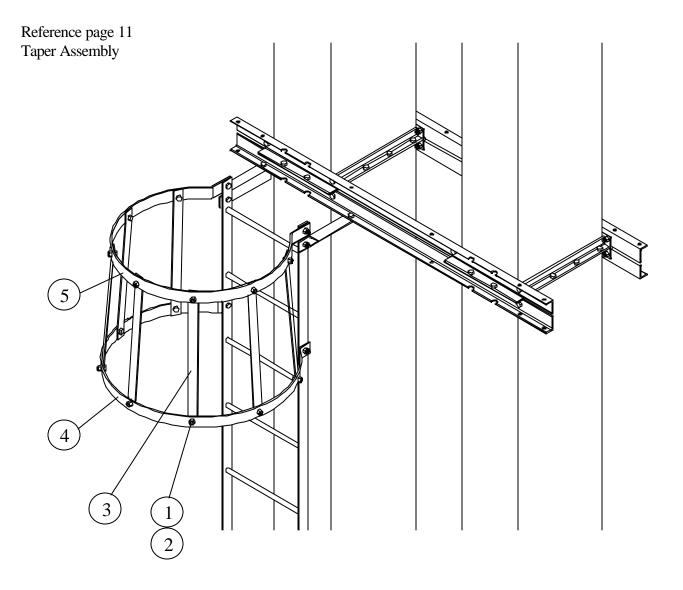


- 1. 1/2"-13x1" Hex Bolt
- 2. 1/2"-13 Hex Nut
- 3. Safety Cage Tapper Vertical Bar (taper-v)
- 4. 30" Safety Cage Hoop (30hoop)
- 5. 27" Safety Cage Hoop (27hoop)

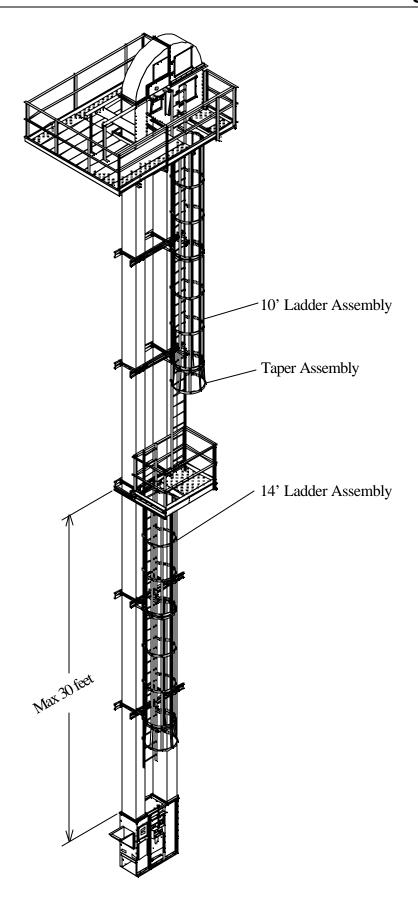



REST PLATFORM ASSEMBLY

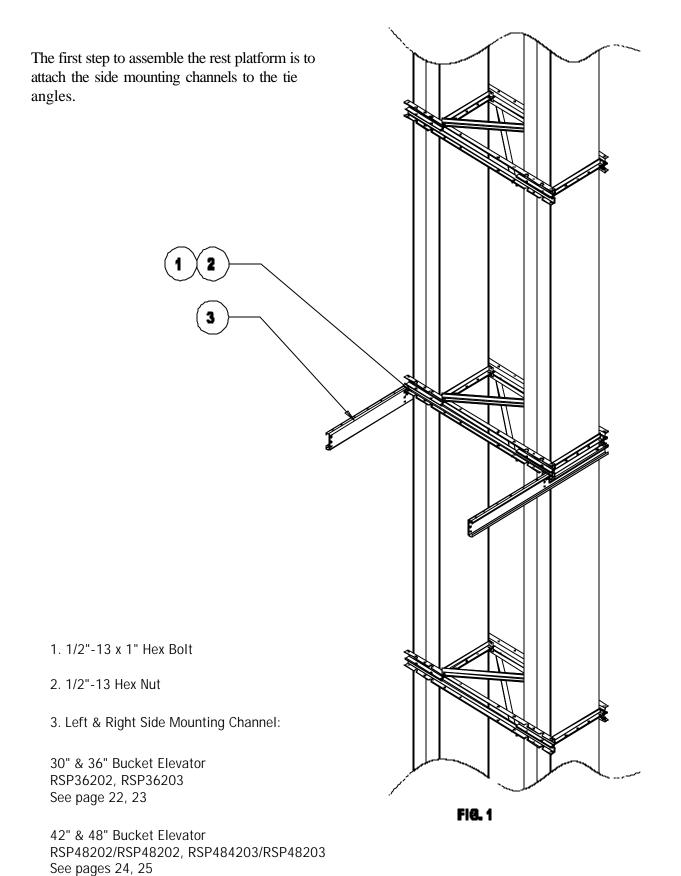

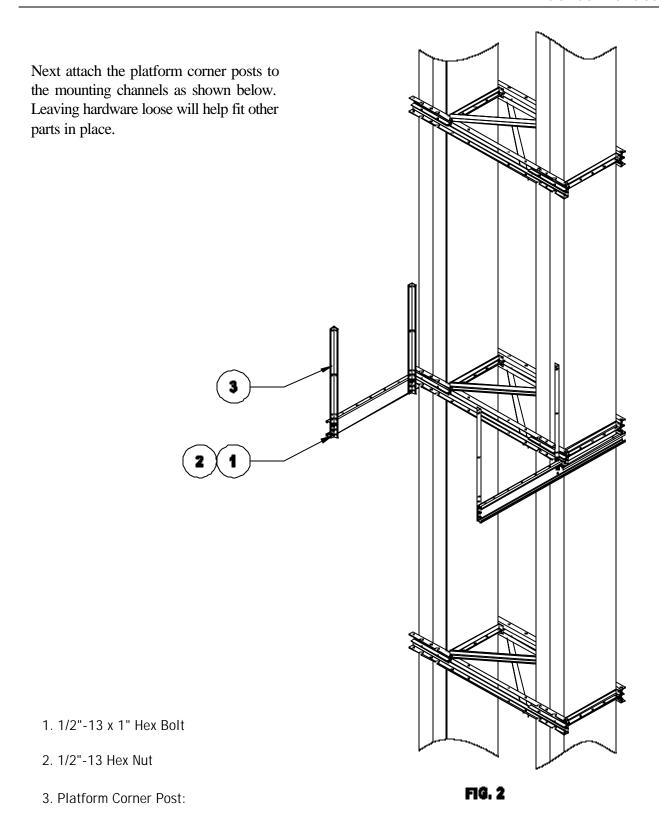


30", 36", 42" & 48" Bucket Elevator RSP48007 See page 24, 25

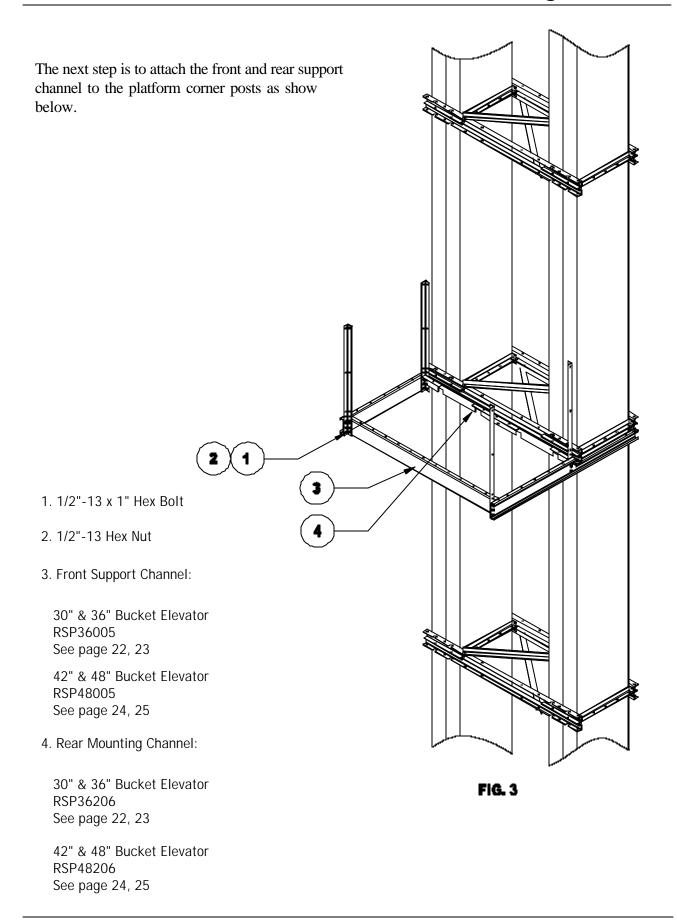

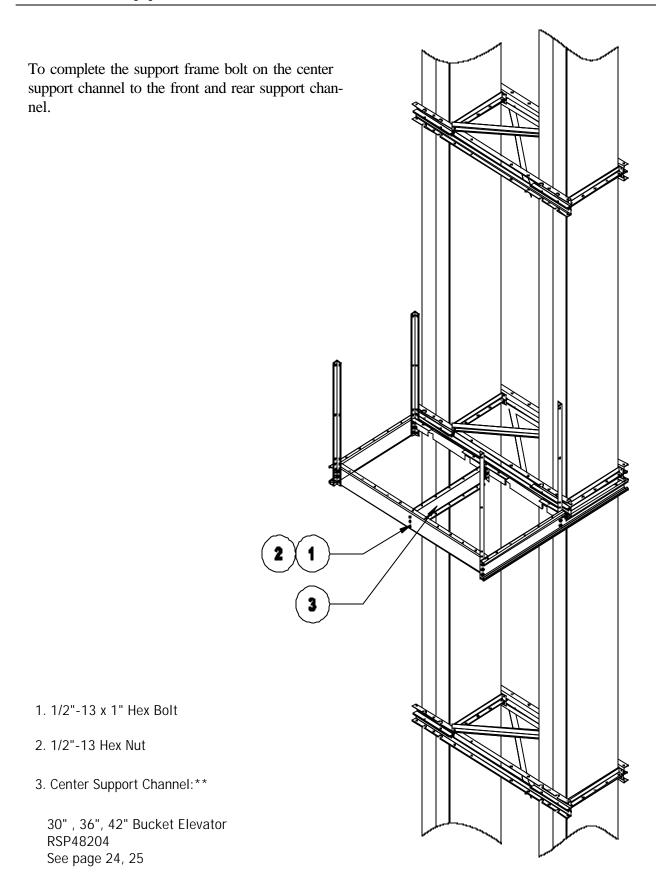


**This setup shows a left side step off. For a right side step off rotate the middle support channel and shift the floor plate.

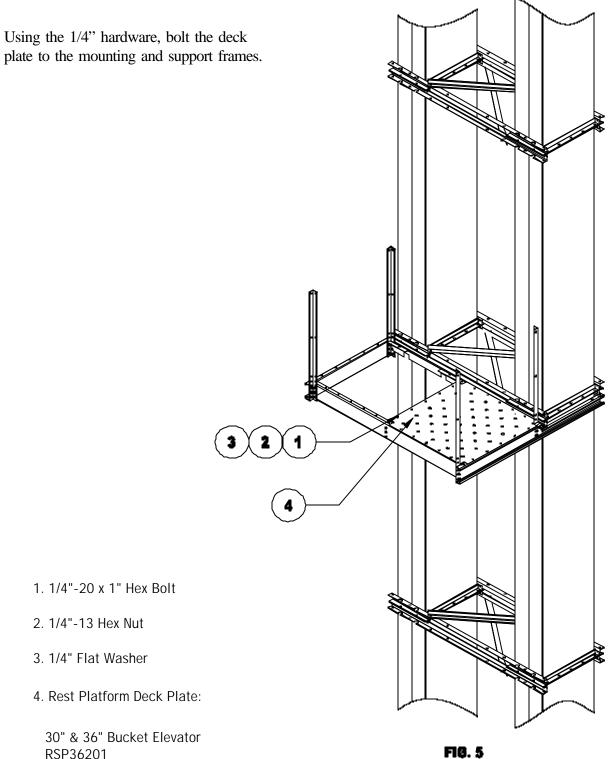



RSP36201 See page 22, 23


42" & 48" Bucket Elevator RSP48201 See page 24, 25

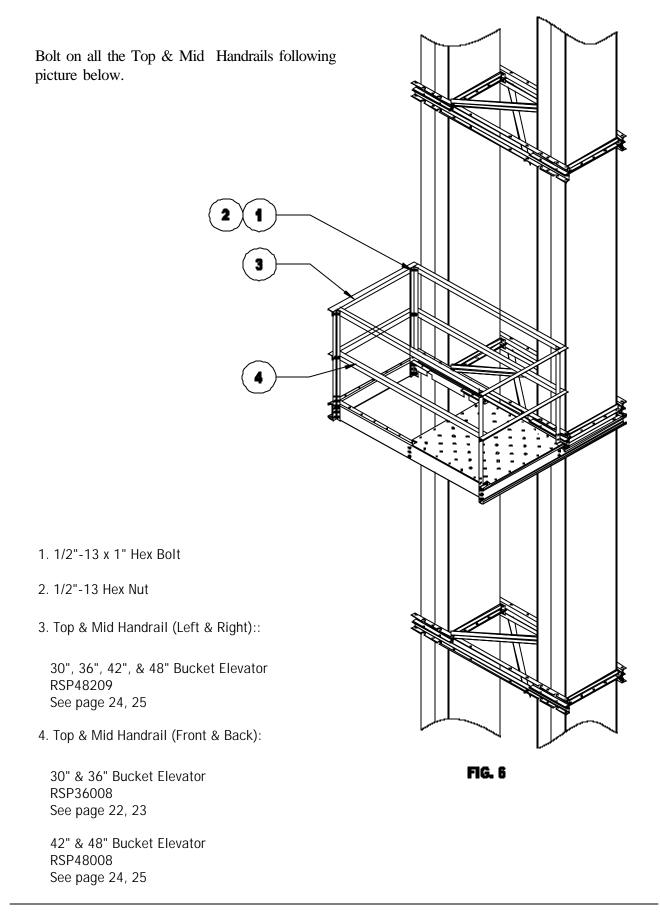



Bucket Elevator Kickplates

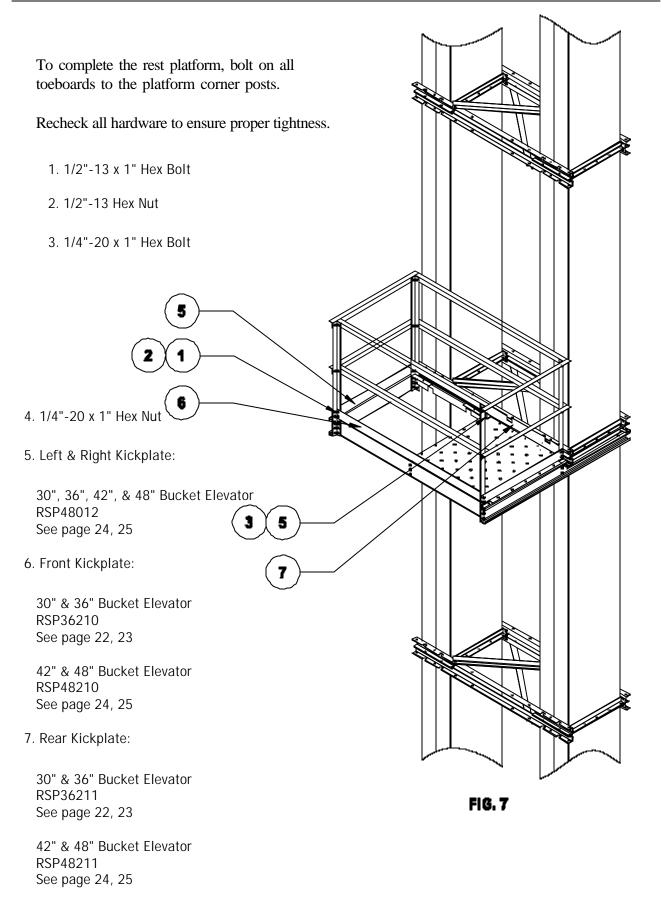


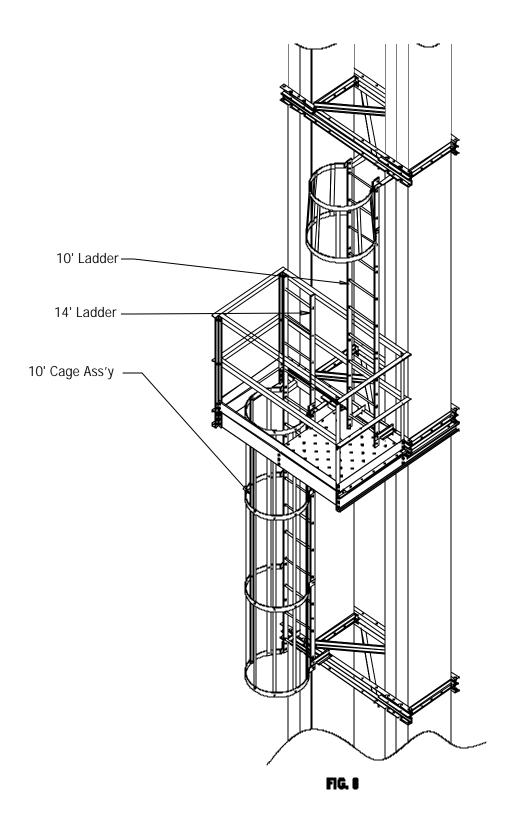


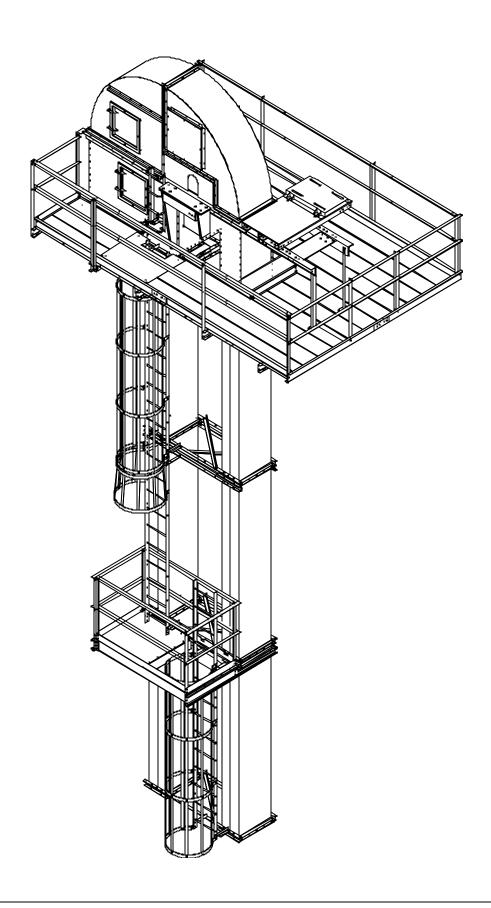

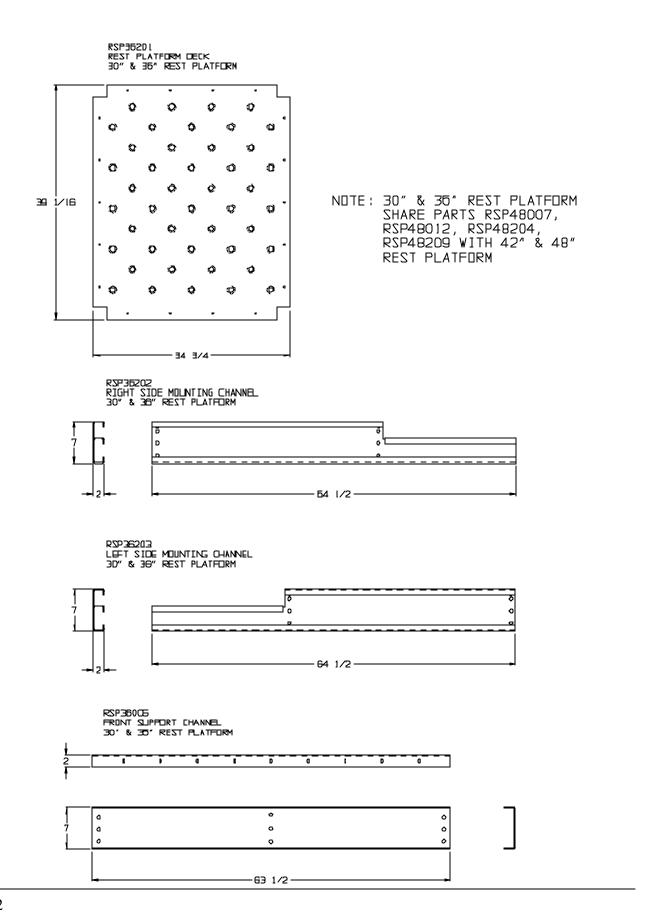

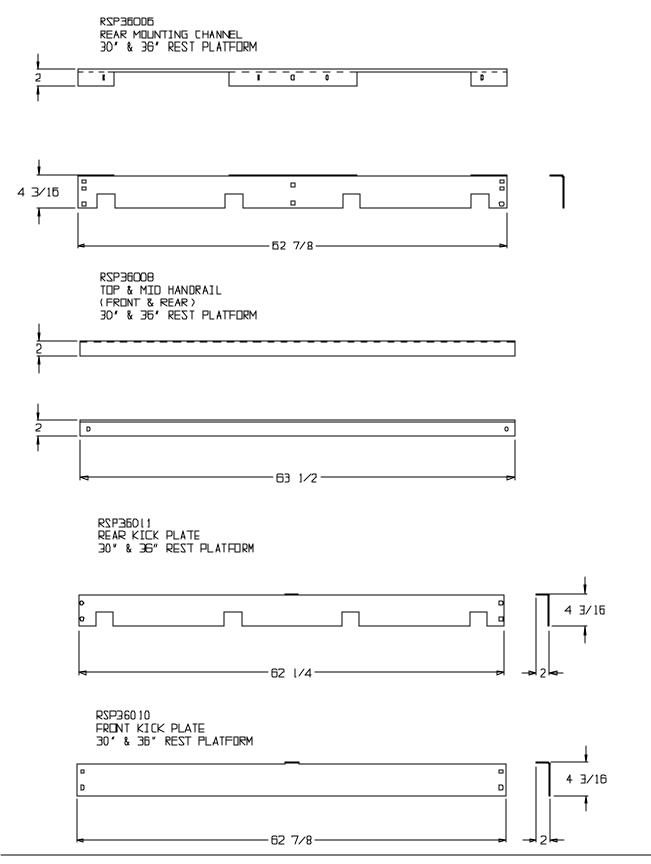

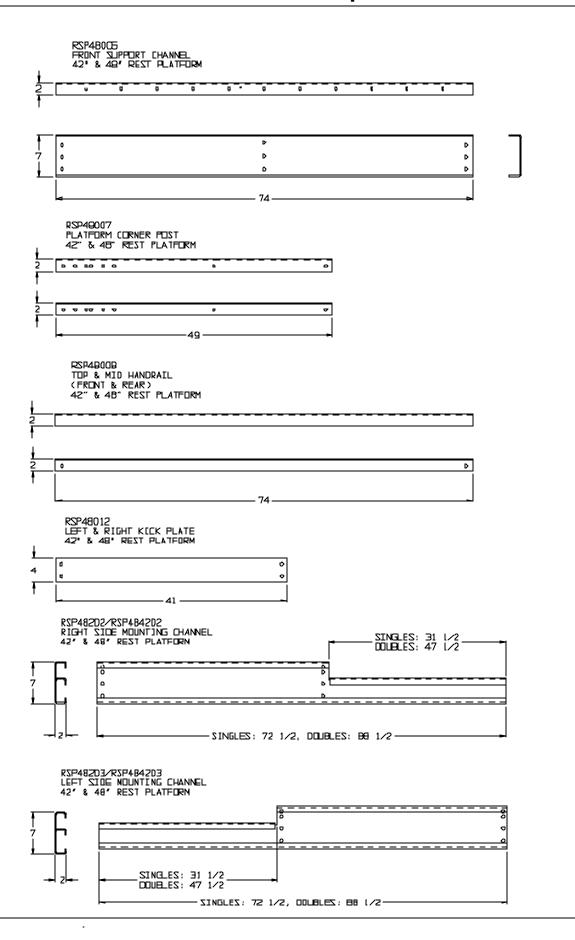

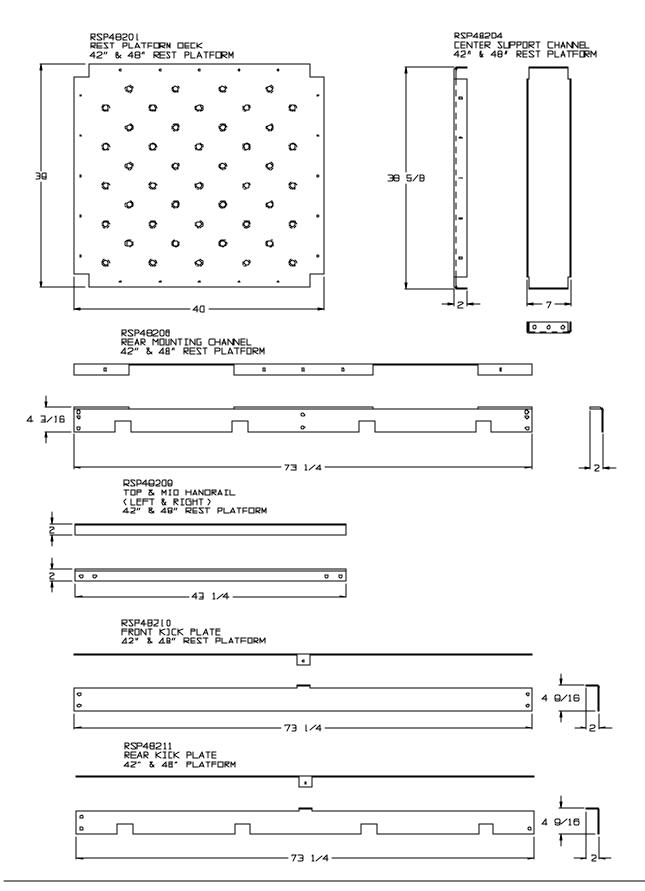

WARRANTY Bucket Elevator

THE COMPANY AS THE MANUFACTURER WARRANTS ALL PRODUCTS MANUFACTURED BY THE COMPANY TO BE FREE OF DEFECTS IN MATERIAL AND WORKMANSHIP UNDER NORMAL USAGE AND CONDITIONS FOR A PERIOD OF TWENTY-FOUR MONTHS AFTER RETAIL SALE TO THE ORIGINAL END USER OF SUCH PRODUCTS. THE COMPANY'S ONLY OBLIGATION IS, AND PURCHASER'S SOLE REMEDY SHALL BE FOR THE COMPANY, TO REPAIR OR REPLACE, AT IT'S OPTION AND EXPENSE, PRODUCTS THAT, IN IT'S SOLE JUDGMENT, CONTAIN A MATERIAL DEFECT DUE TO MATERIALS OR WORKMANSHIP. ALL DELIVERY AND SHIPMENT CHARGES TO AND FROM THE COMPANY'S FACTORY WILL BE PURCHASER'S RESPONSIBILITY. EXPENSES INCURRED BY OR ON BEHALF OF THE PURCHASER WITHOUT PRIOR WRITTEN AUTHORIZATION FROM AN AUTHORIZED EMPLOYEE OF THE COMPANY SHALL BE THE SOLE RESPONSIBILITY OF THE PURCHASER.

EXCEPT FOR THE ABOVE STATED EXPRESS LIMITED WARRANTIES, THE COMPANY MAKES NO WARRANTY OF ANY KIND, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE IN CONNECTION WITH (i) PRODUCT MANUFACTURED OR SOLD BY THE COMPANY OR (ii) ANY ADVICE, INSTRUCTION, RECOMMENDATION OR SUGGESTION PROVIDED BY AN AGENT, REPRESENTATIVE OR EMPLOYEE OF GSI REGARDING OR RELATED TO THE CONFIGURATION, INSTALLATION, LAYOUT, SUITABILITY FOR A PARTICULAR PURPOSE, OR DESIGN OF SUCH PRODUCT OR PRODUCTS.

IN NO EVENT SHALL THE COMPANY BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOSS OF ANTICIPATED PROFITS OR BENEFITS. PURCHASER'S SOLE AND EXCLUSIVE REMEDY SHALL BE LIMITED TO THAT STATED ABOVE, WHICH SHALL NOT EXCEED THE AMOUNT PAID FOR THE PRODUCT PURCHASED. THIS WARRANTY IS NOT TRANSFERABLE AND APPLIES ONLY TO THE ORIGINAL PURCHASER. THE COMPANY SHALL HAVE NO OBLIGATION OR RESPONSIBILITY FOR ANY REPRESENTATIVE OR WARRANTIES MADE BY OR ON BEHALF OF ANY DEALER, AGENT OR DISTRIBUTOR OF THE COMPANY.

THE COMPANY ASSUMES NO RESPONSIBILITY FOR FIELD MODIFICATIONS OR ERECTION DEFECTS WHICH CREATE STRUCTURAL OR STORAGE QUALITY PROBLEMS. MODIFICATIONS TO THE PRODUCT NOT SPECIFICALLY COVERED BY THE CONTENTS OF THIS MANUAL WILL NULLIFY ANY PRODUCT WARRANTY THAT MIGHT HAVE BEEN OTHERWISE AVAILABLE.

THE FOREGOING WARRANTY SHALL NOT COVER PRODUCTS OR PARTS WHICH HAVE BEEN DAMAGED BY NEGLIGENT USE, MISUSE, ALTERATION OR ACCIDENT. THIS WARRANTY COVERS ONLY PRODUCTS MANUFACTURED BY THE COMPANY. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES EXPRESS OR IMPLIED. THE COMPANY RESERVES THE RIGHT TO MAKE DESIGN OR SPECIFICATION CHANGES AT ANY TIME.

PRIOR TO INSTALLATION, PURCHASER HAS THE RESPONSIBILITY TO RESEARCH AND COMPLY WITH ALL FEDERAL, STATE AND LOCAL CODES WHICH MAY APPLY TO THE LOCATION AND INSTALLATION.

THE GSI GROUP

1004 East Illinois Street Assumption, II 52510-0020