



# 2003 Series 2000 Autoflow Operation Software Version 2.15

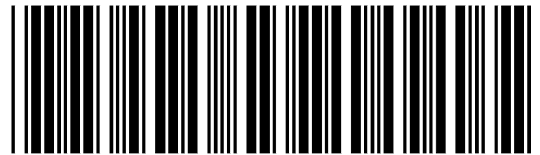

PNEG-696

PNEG-696

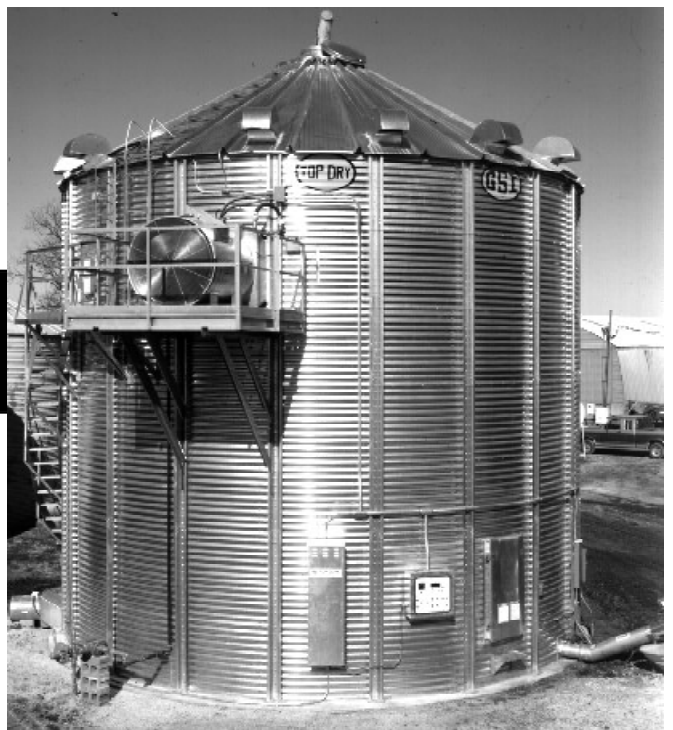

a division of


THE GSI GROUP





Roof Damage Warning and Disclaimer.....4  
Safety.....5  
Safety Precautions.....6  
Safety Sign-Off Sheet.....7  
Electrical Power Supply.....8  
Electronic Monitoring Control System.....9  
    Dryer Control Panel.....10  
    Set-Up Standard.....14  
    Set-Up Extended.....15  
Fill System Control Box.....18  
Error Messages.....20  
Pre-Season Checks.....24  
Top Dry Autoflow Theory of Operation.....27  
Start Up Procedure.....29  
TopDry Autoflow Drying Rates for Shelled Corn.....32  
TopDry Batch Drying Rates for Shelled Corn.....33  
Warranty.....34

**Roof Damage Warning and Disclaimer**

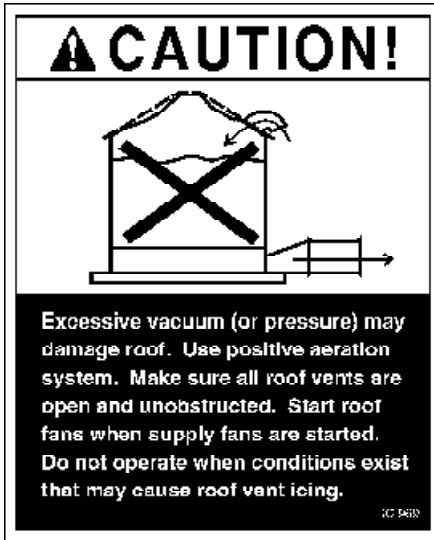

GSI DOES NOT WARRANT ANY ROOF DAMAGE CAUSED BY EXCESSIVE VACUUM OR INTERNAL PRESSURE FROM FANS OR OTHER AIR MOVING SYSTEMS. ADEQUATE VENTILATION AND/OR "MAKEUP AIR" DEVICES SHOULD BE PROVIDED FOR ALL POWERED AIR HANDLING SYSTEMS. GSI DOES NOT RECOMMEND THE USE OF DOWNWARD FLOW SYSTEMS (SUCTION). SEVERE ROOF DAMAGE CAN RESULT FROM ANY BLOCKAGE OF AIR PASSAGES. RUNNING FANS DURING HIGH HUMIDITY/COLD WEATHER CONDITIONS CAN CAUSE AIR EXHAUST OR INTAKE PORTS TO FREEZE.

**Fan/Heater Installation & Operating Instructions**

Thank you for choosing a Top Dry Series Autoflow. It is designed to give excellent performance and service for many years.

This manual describes the installation for all standard production Top Dry Series 2000 single fan, multi-fan and 2000 Series Heater Control units. Different models are available for liquid propane or natural gas fuel supply, with either single phase 230 volt, or three phase 208, 220, 380, 460 or 575 volt electrical power.

The principal concern of the GSI Group, Inc. ("GSI") is your safety and the safety of others asso-

ciated with grain handling equipment. This manual is written to help you understand safe operating procedures, and some of the problems that may be encountered by the operator or other personnel.

As owner and/or operator, it is your responsibility to know what requirements, hazards and precautions exist, and to inform all personnel associated with the equipment, or who are in the fan area. Avoid any alterations to the equipment. Such alterations may produce a very dangerous situation, where serious injury or death may occur.

**Safety Alert Symbol**

The symbol shown is used to call your attention to instructions concerning your personal safety. Watch for this symbol; it points out important safety precautions. It means "ATTENTION", "WARNING", "CAUTION", and "DANGER". Read the message and be cautious to the possibility of personal injury or death.



**WARNING! BE ALERT!**  
 Personnel operating or working around electric fans should read this manual. This manual must be delivered with the equipment to its owner. Failure to read this manual and its safety instructions is a misuse of the equipment.


Grain Systems, Inc. recommends contacting your local power company, and having a representative survey your installation so the wiring is compatible with their system, and adequate power is supplied to your unit.

Safety decals should be read and understood by all people in the grain handling area. The rotating blade, fire warning decals and voltage danger decal must be displayed on the fan can. The bottom right decal should be present on the inside bin door cover of the two ring door, 24" porthole door cover and the roof manway cover.

If a decal is damaged or is missing contact:

Grain Systems, Inc.  
 1004 E. Illinois St.  
 Assumption, IL 62510  
 217-226-4421


A free replacement will be sent to you.



**⚠ WARNING**

Stay clear of rotating blade. Blade could start automatically. Can cause serious injury. Disconnect power before servicing.

DC-1225



**⚠ WARNING**

Flame and pressure beyond door. Do not operate with service door removed. Keep head and hands clear. Can cause serious injury.

DC-1227

**⚠ DANGER!**



High voltage. Will cause serious injury or death. Lockout power before servicing.

DC-1224

**⚠ DANGER!**



Automatic equipment can start at anytime. Do not enter until fuel is shut off and electrical power is locked in off position. Failure to do so will result in serious injury or death.

DC-973

**READ THESE INSTRUCTIONS  
BEFORE OPERATION AND SERVICE  
SAVE FOR FUTURE REFERENCE**

1. Read and understand the operating manual before trying to operate the dryer.
2. Power supply should be OFF for service of electrical components. Use CAUTION in checking voltage or other procedures requiring power to be ON.
3. Check for gas leaks at all gas pipe connections. If any leaks are detected, do not operate the dryer. Shut down and repair before further operation.
4. Never attempt to operate the dryer by jumping or otherwise bypassing any safety devices on the unit.
5. Set pressure regulator to avoid excessive gas pressure applied to burner during ignition and when burner is in operation. Do not exceed maximum recommended drying temperature.
6. Keep the dryer clean. Do not allow fine material to accumulate in the plenum or drying chamber.
7. Use CAUTION in working around high speed fans, gas burners, augers and auxiliary conveyors which START AUTOMATICALLY.
8. Do not operate in any area where combustible material will be drawn into the fan.
9. Before attempting to remove and reinstall any propellor, make certain to read the recommended procedure listed within the servicing section of the manual.
10. Clean grain is easier to dry. Fine material increases resistance to airflow and requires removal of extra moisture.

**This product is intended for the use of grain handling only. Any other use is considered a misuse of the product.**

**Some edges of the product components can be sharp. It is recommended that each component of this product be examined to determine if there are any safety considerations to be taken. Any and all necessary personal protective equipment should be worn at all times when handling, assembling, installing and operation of the product and/or components.**

**Guards are removed for illustration purpose only. All guards must be in place before/during operation.**

**Use Caution in the  
Operation of this  
Equipment**

The design and manufacture of this dryer is directed toward operator safety. However, the very nature of a grain dryer having a gas burner, high voltage electrical equipment and high speed rotating parts, does present a hazard to personnel, which can not be completely safeguarded against, without interfering with efficient operation and reasonable access to components.

Use extreme caution in working around high speed fans, gas-fired heaters, augers and auxiliary conveyors, which may start without warning when the dryer is operating on automatic control.

---

**KEEP THE DRYER CLEAN  
DO NOT ALLOW FINE  
MATERIAL TO ACCUMULATE  
IN THE PLENUM CHAMBER  
OR SURROUNDING THE  
OUTSIDE OF THE DRYER**

---

Continued safe, dependable operation of automatic equipment depends, to a great degree, upon the owner. For a safe and dependable drying system, follow the recommendations within this manual, and make it a practice to regularly inspect the operation of the unit for any developing problems or unsafe conditions.

Take special note of the safety precautions listed above before attempting to operate the dryer.



## Power Supply

An adequate power supply and proper wiring are important factors for maximum performance and long life of the dryer. Electrical service must be adequate enough to prevent low voltage damage to motors and control circuits (see Electrical Load Information).

## Transformer and Wiring Voltage Drop

It is necessary to know the distance from the unit to the available transformer, and the horsepower of your fan unit. Advise the service representative of your local power supplier that an additional load will be placed on the line. Each fan motor should be wired through a fused or circuit breaker disconnect switch. Check on KVA rating of transformers, considering total horsepower load. The power supply wiring, main switch equipment and transformers must provide adequate motor starting and operating voltage. Voltage drop during motor starting should not exceed 14% of normal voltage, and after motor is running at full speed it should be within 8% of normal voltage. Check Electrical Load Information for HP ratings and maximum amp loads to properly size wire and fusing elements. Standard electrical safety practices and codes should be used. (Refer to National Electrical Code Standard Handbook by National Fire Protection Association).

## Machine to Earth Grounding

It is very important that a *Machine To Earth Ground Rod* be installed at the fan. This is true even if there is a ground at the pole 15 feet away. Place the ground rod that comes standard, within 8 feet of the dryer and attach it to the dryer control panel with at least a #6 solid, bare, copper ground wire and the clamp provided. The grounding rod located at the power pole will not provide adequate grounding for the dryer. The proper grounding will provide additional safety in case of any short and will ensure long life of all circuit

boards, and the ignition system. The ground rod must be in accordance with local requirements.

## Proper Installation of Ground Rod

It is not recommended that the rod be driven into dry ground.

Follow these instructions for proper installation:

1. Dig a hole large enough to hold 1 to 2 gallons of water.
2. Fill hole with water.
3. Insert rod through water and jab it into the ground.
4. Continue jabbing the rod up and down. The water will work its way down the hole, making it possible to work the rod completely into the ground. This method of installing the rod gives a good conductive bond with the surrounding soil.
5. Connect the bare, copper ground wire to the rod with the proper ground rod clamp. See Figure 8.
6. Connect the bare copper ground wire to the fan control boxes with a grounding lug.
7. Ground wire must not have any breaks or splices.





**Dig a hole large enough to hold 1 or 2 gallons of water. Work the ground rod into the earth until it is completely in the ground.**



**Electronic Monitoring Control System**

MOISTURE CONTROL SWITCH

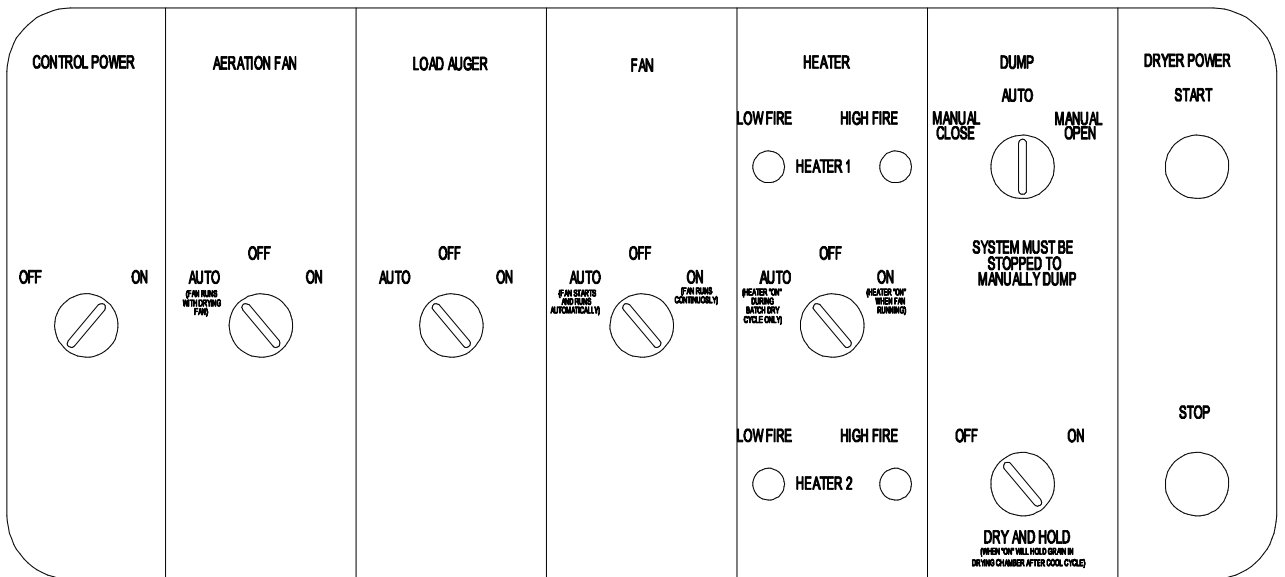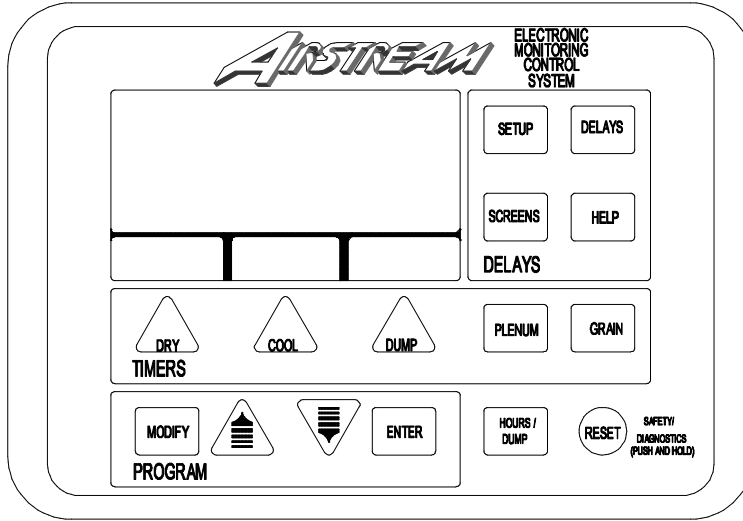

## Dryer Control Panel Featuring the Electronic Monitoring Control System

The control panel provides easy access to gauges and controls, and the illuminated switches provide a quick reference for every operating function. The patent pending Electronic Monitoring Control System is a computerized control system that gives instant information regarding dryer operation.

### Moisture Control Switch

This switch determines if the grain temperature setpoint is used in the operation of the dryer. When placed in the “on” position the dryer will not enter the dump cycle until the grain temperature has reached the grain temperature setpoint and the dry timer has reached zero. When placed in the “off” position the moisture control switch lights up when the grain temperature is below the grain temperature setpoint. When placed in the “off” position the dryer ignores the grain temperature and operates strictly off of the dry timer. When placed in the “on” position the moisture control switch does not light up.

### Control Power Switch

The power to the Electronic Monitoring Control System is turned on or off with the control power switch. The switch lights up when placed in the “on” position. If the switch is placed in the “on” position and the light does not light up make sure that the emergency stop switches located on the Autoflow control box, and Fill System control box are pulled out.

### Aeration Fan Switch

This switch controls the operation of the aeration fan located at the bottom of the bin. The switch lights up when the aeration fan comes on. When placed in the “auto” position the aeration fan starts and stops with the main drying fans. When placed in the “off” position the aeration fan will not run. When placed in

the “on” position the aeration fan comes on when the dryer is running.

If the Aeration Fan Bypass is enabled in the Set-up, the aeration fan remains running when the aeration fan switch on the dryer control panel is placed in the “on” position. With the aeration fan switch placed in the “auto” position the aeration fan will stop any time the dryer stops.

### Load Auger Switch

This switch controls the operation of the fill system(s) that load grain into the drying chamber. The switch lights up when the fill system(s) are running. When placed in the “auto” position the fill system(s) start and stop automatically depending on the level of grain relative to the drying chamber high level rotary switch. When operating in the Autobatch mode the fill system(s) will shut off 2/3 of the way through the dry cycle even if grain has not reached the drying chamber high level rotary switch. When placed in the “off” position the fill system(s) will not run. When placed in the “on” position the fill system(s) work the same as in Auto, except the Out of Grain Timer is ignored.

### Fan Switch

This switch controls the operation of the main drying fan(s). The switch lights up when the airswitch located in the sidewall next to the master drying fan senses an increase in static pressure and closes. In the Autoflow mode, when placed in the “auto” position the main drying fan(s) start when grain reaches the drying chamber low level rotary switch and do not stop until the dryer shuts down or is stopped manually by pressing the stop switch. In the Autobatch mode the main drying fan(s) shut off automatically in the dump cycle. When placed in the “off” position the main drying fan(s) will not run. When placed in the “on” position the main drying fan(s) come on and stay on when the dryer is running.

### Heater Switch

This switch controls the operation of the burner(s). The switch lights up when the burner is on. When the burner is on small lights above and below the heater switch indicate if the burner(s) are in high fire or low fire. In the Autoflow mode, when placed in the “auto” position, the burner(s) fire when grain reaches the drying chamber low level rotary switch and do not stop until the dryer shuts down or is stopped manually by pressing the stop switch. In the Autobatch mode the burner(s) shut off automatically in the cool and dump cycle. When placed in the “off” position the burner(s) will not fire. When placed in the “on” position the burner(s) fire anytime the main drying fan(s) are running.

### Dump Switch

This switch controls the operation of the linear actuator housed in the actuator control box. The switch lights up when the linear actuator is moving. When placed in the “manual close position” the linear actuator in the actuator control box retracts- raising the dump chutes. When placed in the “auto” position the linear actuator extends at the beginning of the dump cycle- lowering the dump chutes, and retracts at the end of the dump cycle- raising the dump chutes. When placed in

the “manual open” position the linear actuator extends- lowering the dump chutes.

### Dry And Hold Switch

When placed in the “on” position the grain in the drying chamber will not be dumped into the storage chamber at the end of the dry cycle, and the dryer will stop and cool for as long as the cool timer is set. If no cooling is desired set to 0. This switch can be used to hold the last batch of grain in the drying chamber and stop the dryer. When placed in the “off” position the dryer will operate normally. The switch lights up when placed in the “on” position.


### Dryer Power Start Switch

This switch starts and operates the dryer based on switch settings. The switch lights up when the dryer is running. The dump switch is disabled after this switch has been pushed.

### Dryer Power Stop Switch

This switch stops all dryer functions. If an automatic dryer shutdown occurs, first determine and correct the cause of the shutdown. Then, press the dryer power stop switch to reset the dryer before starting.

Electronic Monitoring Control System

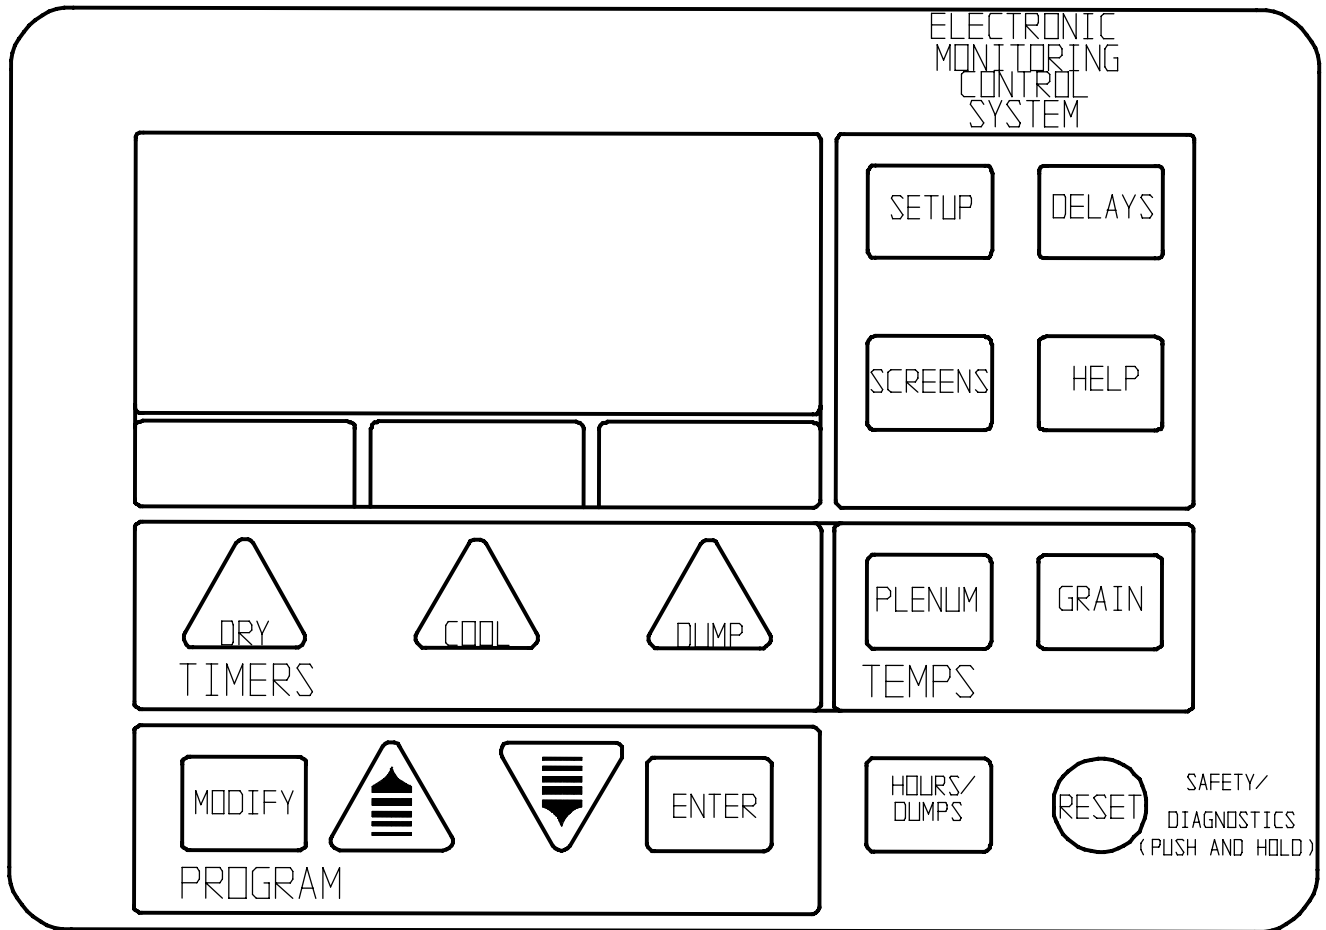

## Electronic Monitoring Control System

The Electronic Monitoring Control System controls all timing functions and safety circuit checks. It is designed to simplify dryer operation by providing printed messages and warnings on its liquid crystal display (LCD).

### Turning On The Electronic Monitoring Control System

Turn the control power switch to the “on” position. The monitor will display a copyright message, software version number and will enter the main drying screen.

### Setting The Dry, Cool And Unload Timers

These switches are used to set the dry, cool and dump cycle times. The current settings on these timers are displayed directly above their timer button. To change the setting of these timers do the following:

- 1) Press the dry, cool or unload timer button.
- 2) Press the modify button.
- 3) Press the increase or decrease button to adjust the settings.
- 4) Press the enter button.
- 5) To enter the new value into memory immediately, press the reset button.

During operation the remaining time on each timer is displayed on the screen. If the power goes out or the dryer is stopped these times are saved by the controller. When the dryer is restarted the timers will continue timing down. The timers will return to their initial settings by pressing the reset button. The Cool Timer is not used on A Autoflow system except when in Cool Down Mode. The Cool Timer is used to determine how long the Top Dry will cool at shutdown. If no Cool Down is desired set Timer to 0. Upon any of the following conditions the system will go into cool down mode.

- 1) Out Of Grain Timer Warning
- 2) Storage Chamber Full Warning
- 3) Low Level Switch Exposed Warning
- 4) Wet Bin Switch Exposed Warning

## Setting The Delays

### The Following Delays are set by pressing the Delays Button

**WET BIN SWITCH DELAY** - If the Wet Supply Rotary Switch is exposed this delay must expire before a warning is given.

**REFILL DELAY** - The REFILL DELAY is used only on batch units. It is the amount of time that the unit has to refill after the dump cycle. If the unit does not refill before the time on the refill delay is at zero the unit will give a “dry chamber empty” error. This delay is not shown in Autoflow Mode.

**HI LEVEL SW DELAY** - The value set on the HI LEVEL SW delay is the amount of time that fill system runs after grain reaches the drying chamber high level rotary switch. The HI LEVEL SW delay should be set long enough so that the drying chamber high level rotary switch is covered with enough grain that the fill system does not start and stop frequently in the dry cycle due to settling or shrinkage; but, the HI LEVEL SW delay should be set short enough so that grain does not reach the drying chamber overflow rotary switch.

**FILL 1 DELAY** - This delay is not used in units with only one fill system controlled by the Autoflow. The value set on the fill 1 delay is the amount of time that fill system number one runs after grain reaches the drying chamber high level rotary switch.

**LOW LEVEL DELAY** - The value set on the low level delay acts as a buffer to allow grain to fall away from the drying chamber low level rotary switch after the drying fans start without giving an error. When grain reaches the drying chamber low level rotary switch the drying cycle starts (if the fan switch is placed in the “auto” or “on” position) and the low level delay begins to time down. If grain falls away from the drying chamber low level rotary switch before the time on the low level delay reaches zero no error is given and the dryer continues in the drying cycle. If grain falls away from the drying chamber low level rotary switch after the low level delay reaches zero a low level switch exposed error is given and the dryer shuts down. The low level delay should be set long enough so that the fill system(s) have sufficient time to make up the grain that falls away from the drying chamber low level rotary switch when the fan(s) and heater(s) start; but, should not be set too long. If the low level delay is set too long and the linear actuator failed to retract, an unacceptable amount of wet grain could flow from the drying chamber to the storage chamber before a low level switch exposed error is given and the dryer shuts down. The low level delay is set using the same procedure as the dry and unload timers, but the reset button does not need to be pressed to enter the new values into memory immediately.

**MOTOR DELAY** - The motor delay is the delay in seconds between the starting of the master fan unit and the slave fan unit. In systems with 220v 1ph electrical power the fan delay should be set at small value - less than 3 seconds. If the motor delay is set too long the slave fan could rotate fast enough backwards to start in a reverse rotation. Use the increase and decrease buttons to select the motor delay. Press the enter button when the correct motor delay is displayed to continue to the main drying screen. In

single fan units the motor delay is not applicable.

**FANS OFF DELAY** - The fans off delay allows the fan and heater unit(s) to be shut down during the dump cycle. This will prevent the drying floor from becoming excessively dirty when there is a large amount of foreign material present in the grain being dried. There are two values that the fans off delay can be set at presently: 1:00 and 0:00. Use the increase and decrease buttons to select the value. When set at 1:00 the fan and heater units will shut off during the dump cycle. When CONTROL SYSTEM set at 0:00 the fan and heater unit(s) will not shut off and the unit will operate normally.

### **Set-up : Standard**

#### **The following options are set by pressing the Setup Button**

**OUT OF GRAIN TIMER** - This timer counts down when the fill system(s) start and will shut them off when it has timed out. Default time is 20 minutes.

**CLEAR TOTAL BATCHES** - Press the reset button to clear the total batches. Press the enter button to continue.

**CLEAR WARNING HISTORY** - Press the reset button to clear the warning history. Press the enter button to continue.

**TIME UNTIL LOAD OFF** - In Autobatch mode is the percentage of time through the dry cycle that the fill systems will be shut off regardless if the dryer is full or not. Press the enter button to return to the main drying screen. This feature is only shown in Autobatch mode.

## Set-up : Extended

The set-up mode is used to program the computer with different variables that influence how the dryer will operate. This mode is accessed by holding in on the modify button when turning on the control panel.

**SET DATE** - Use the increase and decrease buttons to select the correct day of month. Press the enter button when the correct day of month is displayed.

**SET MONTH** - Use the increase and decrease buttons to select the correct year. Press the enter button when the correct month is displayed.

**SET YEAR** - Use the increase and decrease buttons to select the correct year. Press the enter button when the correct year is displayed.

**SET HOUR** - Use the increase and decrease buttons to select the correct hour. Press the enter button when the correct hour is displayed.

**SET MINUTE** - Use the increase and decrease buttons to select the correct minute. Press the enter button when the correct minute is displayed.

**AIR SWITCH** - Use the increase and decrease buttons to toggle between enabled or disabled. If disabled is selected the dryer does not require proof of airflow before the burner lights. If enabled is selected the dryer requires proof of airflow to light the burner. Each time the dryer control power is shut off the

airswitch test defaults to enabled.

**LOW LEVEL SWITCH**- Use the increase and decrease buttons to toggle between enabled and disabled. If the disabled the computer will ignore the status of the drying chamber low level rotary switch. If enabled the dryer will monitor the status of the drying chamber low level rotary switch.

**WET TANK SWITCH** - Use the increase and decrease buttons to toggle between enabled and disabled. If the disabled the computer will ignore the status of the wet supply rotary switch. If enabled the dryer will monitor the status of the wet supply rotary switch.

**START FANS WITH HIGH** - Determines whether the drying fan(s) will start with the drying chamber high level or drying chamber low level rotary switch. Use the increase and decrease buttons to toggle between enabled or disabled. In most situations the fan(s) should be started with the drying chamber low level rotary switch. If the drying chamber high level rotary switch is selected to control the starting of the main drying fan(s) the dry cycle and main drying fan(s) will not start until grain reaches the drying chamber high level rotary switch. Again, this mode of operation is not recommended.

**AERATION FAN BYPASS** - Allows the aeration fan to remain running after the dryer has shut down. Use the increase and decrease buttons to toggle between enabled and disabled. When the aeration fan bypass is enabled the aeration fan will remain running after the dryer has stopped if the aeration switch on the dryer front panel is placed in the "on" position. When the aeration fan bypass is disabled the aeration fan stops with the dryer.

# OF FILL SYSTEMS - Use the increase and decrease buttons to toggle between one or two fill systems. Press the enter button when the number of fill systems displayed on the screen equals the number of fill systems that the computer will be controlling. If one fill system is selected only one fill system will be controlled by the computer. The Hi Level SWdelay will be used to delay the shut off of the fill system after the drying chamber is full. The Fill 1 delay will have no effect on the operation of the fill system. If two fill systems are selected two fill systems will be controlled by the computer. Both the Hi Level SWdelay and the Fill 1 delay are used by the computer to delay the shut-off of the fill systems after the drying chamber is full.

SELECT DRYER TYPE - Use the increase and decrease buttons to select one of the four model types that fits your system. The four models are as follows:

AF2 - Autoflow with two main drying fans

AF1 - Autoflow with one main drying fan

AB2 - Autobatch with two main drying fans

AB1 - Autobatch with one main drying fan

Most systems will be either an Autoflow with one fan or an Autoflow with two fans. Press the enter button when the correct model number is displayed.

SELECT TEMP SCALE - Use the increase and decrease buttons to toggle between Fahrenheit or Celsius. Press the enter button when the correct scale is displayed.

BURNER CYCLE - On/Off or Hi-lo cycle.

BURNER DIFFENTIAL - Use the increase and the decrease buttons to change the burner differential. The burner differential is the span in degrees between high fire and low fire when the Hi/Lo option has been selected. When the temperature in the dryer

reaches the plenum temperature setpoint plus the differential the burner will cycle from high fire to low fire. When the temperature in the dryer falls to the plenum temperature setpoint minus the differential the burner will cycle from low fire to high fire. Example: Plenum temperature setpoint = 180 degrees, temperature differential set to 3 degrees. The burner will cycle from high fire to low fire at 183 degrees and will cycle from low fire to high fire at 177 degrees. When burners are set to

DIESEL- Select for diesel burners only.

PLENUM HI LIMIT- Setable hi limit that will shut the dryer down when met. Default is 20 degrees above set plenum set point.

GRAIN TEMP HI LIMIT- Setable hi limit that will shut the dryer down when met. Default is 30 degrees above set plenum set point.

## Plenum and Grain Temperature settings. Screens button options

### Plenum

The temperature that the burner cycles from hi-fire to low fire is set here. Use the increase and decrease to change the value. Press enter when done.


### Grain

The grain temperature set-point is set here. Use the increase and decrease buttons to change the grain temperature setpoint. Press the enter button when done.

### Screens

By pressing the screens button you can toggle between two screens. Screen #1 displays the current plenum and grain temperatures and their setpoints in parenthesis. Screen #2 displays the status of the drying chamber rotary switches and the total number of batches. In all screens the dry time and dump time are displayed at the bottom of the screen.



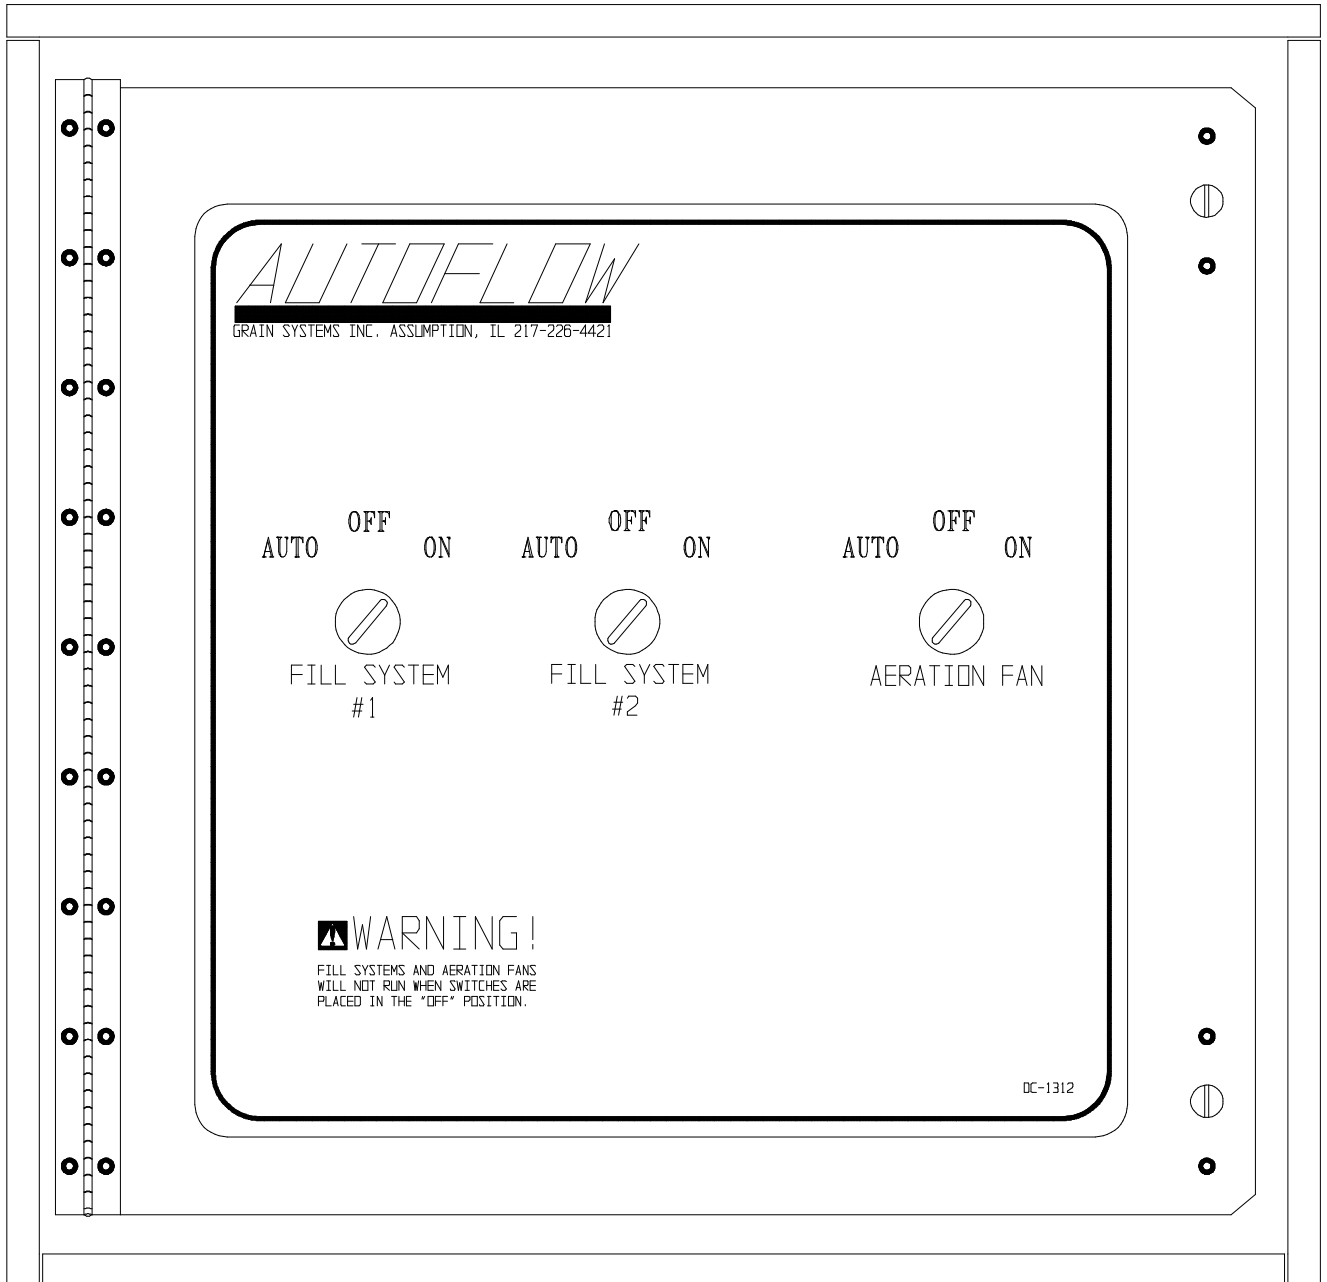

### **Fill System Control Box**

The fill system control box houses the motor starters for fill system #1, fill system #2 and the aeration fan. Switches are located on the front of the fill system control box, and an emergency stop switch is located on the side of the control box.

#### **Fill System #1**

This switch is used to start and stop fill system #1 manually. The switch should be left in the “auto” position for normal dryer operation. If the switch is placed in the “off” position fill system #1 will not start, and will stop if running. If the dryer control power is on, fill system #1 can be activated by placing the switch in the “on” position. When placed in the “on” position, fill system #1 will operate continuously.

#### **Fill System #2**

This switch is used to start and stop fill system #2 manually. The switch should be left in the “auto” position for normal dryer operation. If the switch is placed in the “off” position fill system #2 will not start, and will stop if running. If the dryer control power is on, fill system #2 can be activated by placing the switch in the “on” position. When placed in the “on” position, fill system #2 will operate continuously.

#### **Aeration Fan**

This switch is used to start and stop the aeration fan manually. The switch should be left in the “auto” position for normal dryer operation. If the switch is placed in the “off” position the aeration fan will not start, and will stop if running. If the dryer control power is on, the aeration fan can be activated by placing the switch in the “on” position. When placed in the “on” position, the aeration fan will operate continuously.

#### **Emergency Stop Switch**

This switch will stop the dryer when pushed, and should be used in case of emergency.

## Error Messages

When the dryer shuts down the user can quickly determine what caused the shutdown by viewing the display on the dryer control panel. The Electronic Monitoring Control System displays the error message and sounds a warning signal to alert the user. The displayed error conditions and their electrical cause are as follows:

### Burner 1 Loss Flame

The flame sensor in burner number one has failed to detect flame. Either the burner failed to light or the flame sensor needs to be adjusted. The flame sensor is the sensor attached to the burner, and has a single lead. If the burner is lighting but the unit is still shutting down due to loss of flame the flame sensor needs to be adjusted. The flame sensor can be adjusted by bending it so it is immersed in flame. If the burner is not lighting make sure that the dryer is getting fuel, all solenoids are opening, and the ignitor is sparking.

### Burner 2 Loss Flame

The flame sensor in burner number two has failed to detect flame. Either the burner failed to light or the flame sensor needs to be adjusted. The flame sensor is the sensor attached to the burner, and has a single lead. If the burner is lighting but the unit is still shutting down due to loss of flame the flame sensor needs to be adjusted. The flame sensor can be adjusted by bending it so it is immersed in flame. If the burner is not lighting make sure that the dryer is getting fuel, all solenoids are opening, and the ignitor is sparking.

### Fan 1 Vapor High Limit

The LP gas vapor temperature sensor located on the gas pipe train downstream from the vaporizer coil on fan and heater number one has opened indicating that the vaporizer coil is running too hot and must be adjusted. This sensor is set at 200 degrees Fahrenheit

and automatically resets itself when cool. The vaporizer is adjusted by loosening the bolt and moving the vaporizer coil away from the flame.

### Fan 2 Vapor High Limit

The LP gas vapor temperature sensor located on the gas pipe train downstream from the vaporizer coil on fan and heater number two has opened indicating that the vaporizer coil is running too hot and must be adjusted. This sensor is set at 200 degrees Fahrenheit and automatically resets itself when cool. The vaporizer is adjusted by loosening the bolt and moving the vaporizer coil away from the flame.

### Fan 1 Housing High Limit

The temperature high limit located on the housing on fan and heater number one opened, indicating that the housing towards the bin has overheated. This high limit sensor is set at 200 degrees Fahrenheit and must be manually reset.

### Fan 2 Housing High Limit

The temperature high limit located on the housing on fan and heater number two opened, indicating that the housing towards the bin has overheated. This high limit sensor is set at 200 degrees Fahrenheit and must be manually reset.

### Plenum High Limit

An over temperature condition has occurred inside the dryer plenum. The plenum high limit is set automatically on the Hi-lo thermostat when the cycle set-point is adjusted and resets automatically when cooled. The lo-fire gas pressure needs to be lowered, or the cycle setpoint on the Hi-lo thermostat needs to be increased if the error is displayed frequently.

**Fan 1 Motor Overload**

The thermal overload in the control box on fan number one has tripped, indicating an overcurrent condition. The overload must be reset manually.

**Fan 2 Motor Overload**

The thermal overload in the control box on fan number two has tripped, indicating an overcurrent condition. The overload must be reset manually.

**Fan 1 Loss Of Airflow**

The contacts on the airswitch, located in the master fan opened due to the fan not turning, or the airswitch may need to be adjusted.

**Fan 2 Loss Of Airflow**

The contacts on the airswitch, located in the slave fan opened due to the fan not turning, or the airswitch may need to be adjusted.

**Drying Chamber Overflow**

The grain level in the drying chamber has reached the drying chamber overflow rotary switch. Grain will have to be dumped from the drying chamber to the storage chamber before the unit can be restarted. This error indicates that either the drying chamber high level rotary switch is faulty or the time on the Hi-Level Switch delay needs to be lowered.

**Bin Grain High Limit Full**

The grain level in the storage chamber has reached the storage chamber high level rotary switch located 3 feet below the fan and heater(s). Grain will have to be removed from the storage chamber before the unit can be restarted.

**Bin High Limit Switch Bad**

The storage chamber high level switch has failed. Both the normally open and the normally closed sides of the switch are in the same state.

**Out Of Grain**

The out of grain timer has ran for longer than it was set. Either you are out of grain or the fill system is filling to slow.

**Wet Supply Empty Press <Enter> To Dry Remaining Grain**

This message is displayed when the start button is pushed and grain has fallen away from the wet supply rotary switch and there is still grain against the drying chamber low level rotary switch. If the enter button is pushed the dryer will restart, but the fill system(s) will not restart.

**Cannot Start Dryer Wet Supply Empty**

This message is displayed when the start button is pushed and grain has fallen away from the wet supply rotary switch and there is no grain against the drying chamber low level rotary switch. Grain will have to be put into the wet supply tank or the drying chamber to start the dryer.

**Low Level Switch Exposed**

This message is displayed when grain falls away from the drying chamber low level rotary switch after the Low Level Switch Delay has reached zero. If the error is being caused due to the settling of grain after the fans start the time on the Low Level Switch Delay can be lengthened.

**Fill 1 Motor Overload**

The thermal overload in the fill system control box for fill system number one has tripped, indicating an overcurrent condition. The overload must be reset manually.

**Fill 2 Motor Overload**

The thermal overload in the fill system control box for fill system number two has tripped, indicating an overcurrent condition. The overload must be reset manually.

**Aeration Overload**

The thermal overload in the fill system control box for the aeration fan has tripped, indicating an overcurrent condition. The overload must be reset manually.

**Grain High Limit**

The grain temperature in the drying chamber is too high. The grain temperature reached a point where it was five degrees less than the plenum cycle setpoint.

---

**Pre-Season Checks**

Before the dryer is filled, thoroughly inspect the unit and check the operation of the dryer as follows. When entering the bin take great caution. Never enter a bin where grain is present.

**Set Control Switches**

- ◆ MOISTURE CONTROL Switch - "On"
- ◆ AERATION FAN Switch - "Off"
- ◆ LOAD AUGER Switch - "Off"
- ◆ FAN Switch - "Off"
- ◆ HEATER Switch - "Off"
- ◆ DUMP Switch - "Auto"
- ◆ DRY and HOLD Switch - "Off"
- ◆ All Emergency Stop Switches must be pulled out. These are located on Fan Heater, Main Control Panel, Fill System Box, and Actuator Box.

---

**Control Power Switch**

Turn the control power switch on. The switch will light up. If a fault is found an error message will be displayed on the screen. If all are found safe, the main drying screen will be displayed.

**Drying Chamber**

Enter the drying chamber and inspect each dump hopper for obstructions that may inhibit the flow of grain into the dump chutes. Make sure that the gap between the discharge flow plates and the floor sheets is a minimum of 1-1/2". All discharge flow plates should be adjusted evenly around the bin. Inspect each discharge flow plate and make sure that the bottom brackets on each flow plate have not collapsed due to pressure from walking around the drying chamber. Inspect the leveling bands. Make sure that all leveling bands are installed properly and in are good shape.

### **Rotary Switches**

View the drying chamber rotary switches from the peak hole on top of the dryer. Make sure that all three rotary switches are spinning freely. Double check the seal on each rotary switch top. The number one cause of switch failure is water. Make sure when the electrician replaced the top on the rotary switch that no creases formed in the gasket. Inspect both the storage and wet supply rotary switches for operation and proper seal.

### **Dump Chutes**

Enter the storage chamber. Make sure that all dump chutes are adjusted evenly. When one chute is level make sure that all chutes are level. This is very critical to the correct operation of the dryer. The center plate that all the dump chute chains attach to should be no greater than 12" from the pulley when the chutes are level. If the center plate is further than 12" from the pulley when the chutes are closed the chains must be lengthened.

### **Linear Actuator**

Turn the Dump switch on the Autoflow control box to the "manual open" position. Use a tape measure to measure the stroke on the linear actuator. The stroke should be between 16" and 18". If the stroke on the actuator is not 16" to 18" the actuator should be adjusted. Make sure that all pulleys and cables are move freely when the actuator is moving. With the actuator extended enter the storage chamber. View each dump chute individually. Make sure that each dump chute opened completely when the actuator extended. If a dump chute does not open completely the double nuts on the bolt that the chutes hinge on need to be loosened. The dump chutes should hinge smoothly. After the chutes have been inspected turn the Dump switch on the Autoflow control box to the "Auto" position and press the stop switch. The chutes should raise.

### **Power Start Button**

Before the dryer start button is pushed make sure there is grain in the wet supply tank. If there is no grain in the wet supply tank the dryer will not start. Push the dryer start button. The screen should no longer be flashing "STOPPED".

### **Fuel Check**

If using LP gas, make sure the tank has plenty of fuel. If using natural gas, make sure an adequate supply is available. If using LP gas, slowly open the main fuel supply valve at the tank. If using natural gas, turn on the valve along the supply line. Then open the ball valve on the fan heater unit(s). Inspect all gas lines and connections for possible leaks. Any gas leaks need to be fixed immediately!

### **Fan**

Make sure that all toggle switches on the fan and heater units are on. Bump the fan switch on the Autoflow control box and observe the fan rotation. The fan should run counterclockwise. Sometimes on three phase models the motor will run backwards. This can easily be reversed by first turning off the power at the main disconnect, then interchanging any two of the three power supply wires coming into the motor starter in the fan control box. Reverse the two outside wires, L1 and L3, and leave the middle one in the same position.

### **Aeration Fan**

Bump the aeration fan switch on the autoflow control box and observe the aeration fan rotation. The aeration fan should run counterclockwise. Sometimes on three phase models the motor will run backwards. This can easily be reversed by first turning off the power at the main disconnect, then interchanging any two of the three power supply wires coming into the motor starter in the fill system control box. Reverse the two outside wires, L1 and L3, and leave the middle one in the same position.

### Fill System

Prepare the wet storage tank to deliver grain to the dryer. Make sure all personnel are away from any machinery that is controlled by the Autoflow. Place the load auger switch in the "Auto" position. The fill system(s) should begin to load grain from the wet supply tank to the dryer. When the display on the Autoflow control box reads "GRAIN LOW LEVEL YES" close the valve that supplies the fill system(s) with wet grain from the wet supply tank. After the fill system(s) have cleaned out place the load auger switch in the "off" position.

### Airswitch

Place the fan and heater service switches on the main drying fan(s) in the "off" position. Place the fan switch on the Autoflow control box in the "on" position. Place the aeration fan switch on the Autoflow control box in the "on" position. Go to the master fan and heater unit. Place the fan service switch in the "on" position. The master fan should start. In two fan units the slave fan should start after the fan delay. In single fan units the display on the master fan will read airflow after the master fan reaches half speed. If the display reads airflow before the fan reaches half speed adjust the airswitch by turning it clockwise. If the display does not read airflow adjust the airswitch by turning it counterclockwise. In two fan units the display on the master fan should read airflow after the slave fan reaches half speed. If the display reads airflow before the fan reaches half speed adjust the airswitch by turning it clockwise. If the display does not read airflow adjust the airswitch by turning it counterclockwise.

### Burner Test Fire

Place the heater switch on the Autoflow control box in the "on" position. Start the main drying

fan(s) if they are not already running. Make sure the fuel supply is on. The burner should ignite after a short purge delay. Gas pressure should be shown on the gauge. Adjust the high fire gas pressure by turning the regulator in and out on LP units; or, by opening and closing the main ball valve on natural gas units. The high fire pressure should be approximately 6-15 lbs. For LP units and 6-10 lbs. For natural gas units. While the heater is in low fire adjust the low fire gas pressure by opening or closing the ball valve located on top of the pipetrain. The low fire gas pressure should be approximately 2-6 lbs. For LP units and 1-3 lbs. For natural gas units. If the burner remains in high fire and does not cycle, increase the gas pressure in order to reach the plenum cycle setpoint. If the burner remains in low fire and does not cycle, slightly decrease the gas pressure at the low fire gas valve. Any time the high fire gas pressure is adjusted the low fire gas pressure needs to be checked. The basic rule-of-thumb for setting gas pressure is as follows: make sure that the temperature in the bin is increasing at a rapid rate when in high fire, and the temperature in the bin is falling at a rapid rate while in low fire.

### Dryer Shutdown

To shut down the dryer, first close the fuel supply valve at the tank or the valve along the fuel supply line. If the burner is operating, let the dryer run out of fuel. It should shut down due to loss of flame. Press the dryer stop button to clear the error, and turn off the main power disconnect at the entrance panel.

### Emergency

In case of an emergency push the emergency stop switch located on the side of the Autoflow control box and the fill system control box. This will shut everything that is controlled by the dryer off immediately.

**Top Dry Autoflow Theory Of Operation:**

**Control Panel Switch Status:**

- ◆ Control Power: “on”
- ◆ Moisture Control Thermostat: “on”
- ◆ Aeration Fan: “auto”
- ◆ Load Auger: “auto”
- ◆ Fan: “auto”
- ◆ Heater: “auto”
- ◆ Dump: “auto”
- ◆ Dry & Hold: “off”

**Emergency Stop Switch Status:**

- ◆ Autoflow Control Box Emergency Stop: “pulled out”
- ◆ Fill System Control Box Emergency Stop: “pulled out”
- ◆ Actuator Control Box 24v Switch: “on”

**Aeration Fan Bypass: “enabled”**

When the Top Dry is in a ready state; that is, with no grain in the Drying Chamber and wet grain in the Wet Storage Tank, Fill System #1 and Fill System #2 will start to fill the Drying Chamber with wet grain when the start switch is pressed on the Dryer Control Panel. In single fill system units only Fill System #1 will start. When grain reaches the Drying Chamber Low Level Rotary Switch the Aeration Fan, and the Master Drying Fan will come on, and the Fan Delay will start to count down. When the Fan Delay reaches zero the Slave Drying Fan will start, the Airswitch will close, and the Dry

Timer will start to count down. In single fan units the Fan Delay will not count down and the Airswitch will close after the Master Drying Fan starts. After a twenty second Purge Delay the fan/heater unit(s) will ignite. When the Plenum Temperature reaches the Cycle Setpoint the fan/heater unit(s) will cycle to Low-Fire. When the Plenum Temperature falls ten degrees below the Cycle Setpoint the fan/heater unit(s) will cycle back to High-Fire. The fan/heater units will continue to cycle throughout the drying process.

When grain reaches the Chamber High Level Rotary Switch the Fill 2 Delay will begin to count down. When the Fill 2 Delay reaches zero Fill System #2 will shut off and the Fill 1 Delay will begin to count down. When the Fill 1 Delay reaches zero Fill System #1 will shut off.

If the Chamber High Level Rotary Switch becomes exposed due to shrinkage of grain in the Drying Chamber, the fill system(s) will start and refill the Drying Chamber. When grain reaches the Chamber High Level Rotary Switch the fill system(s) will shut off after the delays.

When the Dry Timer reaches zero and the Grain Temperature Setpoint is above the current grain temperature the dryer will go into Temperature Hold. When the grain temperature reaches the Grain Temperature Setpoint the unit will continue to the Dump Cycle. In the Dump Cycle the Linear Actuator in the Actuator Control Box extends, the dump chutes lower, and grain is dumped from the Drying Chamber into the Storage Chamber. Immediately after the dump chutes open the Dump Timer begins to count down. When the Dump Timer reaches zero the dump chutes raise and grain stops dumping from the Drying Chamber into the Storage Chamber. During the Dump Cycle 1/3 of the grain is dumped into the Storage Chamber.

After the Dump Cycle the unit returns to the beginning of the Dry Cycle, the fill system(s) refill the Drying Chamber and the process begins again. If the Dry Timer reaches zero after the grain temperature reaches the Grain Temperature Setpoint the unit does not enter Temperature Hold. It goes right to the Dump Cycle.

The unit continues with the same operation until either no grain is present against the Wet Supply Rotary Switch, or the Storage Chamber becomes full.

continued on page 26



## Series 2000 Autoflow Operation

If the Wet Storage Tank becomes empty while the fill systems are running, the Fill 1 and Fill 2 Delays starts to count down. When the Fill 1 and Fill 2 Delays reach zero the fill system(s) shut off along with the dryer and a Wet Supply Hopper Empty “Out of Grain” error is displayed on the Dryer Control Panel screen. If there is grain against the Drying Chamber Low Level Rotary Switch the unit can be restarted by pressing the start switch. When the start switch is pressed the screen on the Dryer Control Panel will read “Press Enter to Dry Remaining Grain”. If the enter button is pushed the dryer will restart without running the fill system(s). The dryer will remain running until the completion of the next Dump Cycle, after which an “Out of Grain” error is displayed on the Dryer Control Panel and the dryer stops.

If the Storage Chamber High-Limit Rotary Switch becomes covered with grain during the Dump Cycle the dryer will continue through the Dump Cycle and will continue to the next Dry Cycle. When the Dry Cycle is complete the unit will not continue to the Dump Cycle. A “Bin Grain Hi Limit” error will be displayed on the screen and the dryer will stop. The unit will not dump automatically until grain has been removed from the Storage Chamber.

If the dryer stops for any reason the Aeration Fan will remain running if the Aeration Fan Bypass is enabled. The Aeration Fan Bypass is set in the Set-up mode. If the Aeration Fan Bypass is disabled the Aeration Fan stops whenever the dryer stops.

---

## Start Up Procedure

At the beginning of each harvest and before filling the dryer with grain make sure to inspect the dryer for rodent damage, and system integrity. Enter the drying chamber and check each dump hopper. Remove any obstructions. Test operate the dryer using the pre-season checklist.

There are two fundamental things to control with the Autoflow Top Dry (or any dryer); the drying rate and the grain flow rate. Drying rate is determined by the dryer size and shape, the grain to be dried, the airflow rate, and the drying air temperature. We consider the best temperature to be the highest one where the desired grain quality is maintained. Corn used for livestock consumption is dried at a maximum recommended temperature of 200 degrees Fahrenheit. Corn used for different applications, and other grains may require lower drying temperatures. By selecting a drying air temperature a drying rate is established. To achieve a desired final grain moisture content, the grain flow rate is adjusted to match the drying rate.

### Initial Dryer Start Up

- 1) Be sure the control power switch is off. Turn on the main power supply disconnect for the Autoflow control box, fan and heaters, and all fill systems.
- 2) Pull out the emergency stop switches on the

Autoflow control box, fill systems control box, and the actuator control box.

3) Set the switches on the Autoflow control box as follows:

- ◆ MOISTURE CONTROL switch - “On”
- ◆ AERATION FAN switch - “Auto”
- ◆ LOAD AUGER switch - “Off”
- ◆ FAN switch - “Auto”
- ◆ HEATER switch - “Auto”
- ◆ DUMP switch - “Auto”
- ◆ DRY and HOLD switch - “Off”

- 4) Make sure there is wet grain in the wet supply tank.
- 5) Turn the control power switch to the “on” position.
- 6) The screen will display a copyright message and software version number.

7) The screen should read "STOPPED". The chamber high level and the chamber low level should both read "NO".

8) Set the dry timer using the following charts for the specific bin size, fan and heater size, drying temperature and grain input moisture content.

9) Set the dump timer as follows:

- ◆ 21' diameter bin = 28 seconds
- ◆ 24' diameter bin = 32 seconds
- ◆ 27' diameter bin = 37 seconds
- ◆ 30' diameter bin = 40 seconds
- ◆ 36' diameter bin = 36 seconds

10) Set all other delays and timers as prescribed in the Electronic Monitoring Control section of this manual.

11) Press the reset button for timer changes to take effect immediately.

12) Set the grain temperature setpoint as follows:

- ◆ 180 degree drying temperature =  
100 degree grain temperature setpoint
- ◆ 170 degree drying temperature =  
103 degree grain temperature setpoint
- ◆ 160 degree drying temperature =  
105 degree grain temperature setpoint
- ◆ 150 degree drying temperature =  
108 degree grain temperature setpoint
- ◆ \*140 degree drying temperature =  
110 degree grain temperature setpoint
- ◆ \*130 degree drying temperature =  
113 degree grain temperature setpoint
- ◆ \*120 degree drying temperature =  
115 degree grain temperature setpoint

\*When drying at a temperature lower than 150 degrees the grain temperature setpoint on the moisture control thermostat may require a lower setting at night.

13) Press the start switch on the dryer control panel.

14) CAUTION! Be sure all personnel are clear of fill systems. Place the load auger switch on the dryer control panel to the "auto" position.

15) The fill system(s) should start immediately.

16) When the grain reaches the drying chamber low level rotary switch the fan and heater(s) should start.

17) When the grain reaches the drying chamber low level rotary switch reaches the drying chamber high level rotary switch the fill system(s) should stop.

18) When the dry timer reaches zero the display should read "TEMP HOLD"

19) When the grain temperature reaches the grain temperature setpoint the dryer should continue to the dump cycle.

20) The dump chutes should lower, grain should dump from the drying chamber into the storage chamber, and the fill system(s) should start.

21) After the dump cycle the dryer should continue to the beginning of the next dry cycle.

22) After the fourth dump stop the dryer.

23) Test the moisture of the dried grain.

24) If the moisture of the grain is too high increase the grain temperature setpoint five degrees for each additional point of moisture to be removed.

25) If the moisture of the grain is too low decrease the grain temperature setpoint five degrees for each additional point of moisture to be added.

26) After the moisture control thermostat is adjusted decrease the time on the dry timer by one-half. The dry timer should not be set lower than the amount of time it takes the dryer to refill after the dump cycle.

27) Restart the dryer. The time on the dry timer should expire before the grain reaches the temperature setpoint.

continued to page 28

28) Any time a change is made to the grain temperature setpoint the dryer must dump four times before the full effect of the change will be made on the moisture of the grain.

**Normal Start Up**

When the dryer is started with grain in the drying chamber that has already been partially dried, the dryer can be started without making any adjustments to time or temperature; however, the moisture of the grain should be checked after the fourth dump.

**Last Fill**

1) Stop the dryer when all the wet grain has been loaded into the drying chamber and turn off the moisture control switch.

2) Set the time on the dry timer for twice the recommended amount using the following charts for the specific bin size, fan and heater size, drying temperature and grain input moisture content.

3) Push the reset button.

4) Turn the dry and hold switch to the “on” position.

5) Turn the load auger switch to the “off” position.

5) Press the start switch.

5) When the dryer shuts down install the fan inlet cover(s).

6) Let the aeration fan cool in the top and store, or manually dump into the storage chamber.

**TOP DRY AUTOFLOW SERIES  
DRYING RATES FOR SHELLED CORN**

AUTOFLOW SERIES			21' Dia.		24' Dia.		30' Dia.	
FAN & HEATER Unit(s)	Plenum Temperature F°	Moisture Content Wet Basis	1-Fan		1-Fan		1-Fan	
			Bu / hr	Minutes Between Dumps	Bu / hr	Minutes Between Dumps	Bu / hr	Minutes Between Dumps
15 H.P. 36" FAN  3.5 Million BTU	160	20%	499	17.4	528	21.6	557	31.9
		25%	316	27.6	334	34.1	353	50.4
		30%	197	44.2	209	54.6	220	80.8
	180	20%	639	13.6	* 675	* 16.8	* 713	* 24.9
		25%	404	21.5	* 428	* 26.6	* 451	* 39.4
		30%	253	34.5	* 267	* 42.6	* 282	* 63.1
	200	20%	* 748	* 11.6	* 791	* 14.4	* 835	* 21.3
		25%	* 474	* 18.4	* 501	* 22.7	* 529	* 33.6
		30%	* 296	* 29.5	* 313	* 36.4	* 330	* 53.9
15 H.P. 40" FAN  6.25 Million BTU	160	20%	584	14.9	648	17.5	711	25.0
		25%	370	23.5	411	27.7	450	39.5
		30%	231	37.7	256	44.4	281	63.3
	180	20%	748	11.6	* 830	* 13.7	* 909	* 19.5
		25%	473	18.4	* 525	* 21.6	* 576	* 30.9
		30%	296	29.5	* 328	* 34.7	* 360	* 49.5
	200	20%	* 875	* 9.9	* 971	* 11.7	* 1,065	* 16.7
		25%	* 554	* 15.7	* 615	* 18.5	* 674	* 26.4
		30%	* 346	* 25.2	* 384	* 29.6	* 421	* 42.2
30 H.P. 42" FAN  10.25 Million BTU	160	20%			740	15.4	806	22.0
		25%			469	24.3	511	34.8
		30%			293	38.9	319	55.8
	180	20%			947	12.0	1,032	17.2
		25%			600	19.0	653	27.2
		30%			375	30.4	408	43.6
	200	20%			1,109	10.2	1,208	14.7
		25%			702	16.2	765	23.2
		30%			439	25.9	478	37.2
40 H.P. 42" FAN  10.25 Million BTU	160	20%					920	19.3
		25%					583	30.5
		30%					364	48.9
	180	20%					1,178	15.1
		25%					746	23.8
		30%					466	38.2
	200	20%					1,379	12.9
		25%					873	20.3
		30%					545	32.6

\*Insufficient burner BTUs for 45 deg. ambient temp.

Est. at ambient temp 45 deg. F, rel. humidity 65%  
Use only as a guide, conditions will vary capacities.

1/4 cfm cooling

**TOP DRY AUTOFLOW SERIES**  
**DRYING RATES FOR SHELLED CORN**

AUTOFLOW SERIES			30' Dia. 2-Fan		36' Dia. 1-Fan		36' Dia. 2-Fan	
FAN & HEATER Unit(s)	Plenum Temperature F°	Moisture Content Wet Basis	Minutes Between		Minutes Between		Minutes Between	
			Bu / hr	Dumps	Bu / hr	Dumps	Bu / hr	Dumps
15 H.P. 36" FAN  3.5 Million BTU	160	20%	939	18.9			993	25.8
		25%	595	29.9			629	40.7
		30%	371	47.9			393	65.2
	180	20%	1,202	14.8			1,271	20.1
		25%	761	23.4			805	31.8
		30%	475	37.4			503	51.0
	200	20%	* 1,407	* 12.6			* 1,488	* 17.2
		25%	* 891	* 19.9			* 943	* 27.2
		30%	* 557	* 32.0			* 589	* 43.5
15 H.P. 40" FAN  6.25 Million BTU	160	20%	1,154	15.4			1,269	20.2
		25%	731	24.3			803	31.9
		30%	457	39.0			502	51.1
	180	20%	1,477	12.0			1,623	15.8
		25%	936	19.0			1,028	24.9
		30%	584	30.4			642	39.9
	200	20%	* 1,730	* 10.2			* 1,901	* 13.4
		25%	* 1,096	* 16.2			* 1,204	* 21.3
		30%	* 684	* 26			* 752	* 34.1
30 H.P. 42" FAN  10.25 Million BTU	160	20%			819	31.3	1,452	17.6
		25%			519	49.4	920	27.8
		30%			324	79.1	574	44.6
	180	20%			1,048	24.4	1,858	13.8
		25%			664	38.6	1,177	21.7
		30%			415	61.8	735	34.8
	200	20%			1,227	20.8	2,176	11.7
		25%			777	32.9	1,378	18.6
		30%			486	52.8	861	29.8
40 H.P. 42" FAN  10.25 Million BTU	160	20%			950	26.9		
		25%			602	42.6		
		30%			376	68.2		
	180	20%			1,216	21.0		
		25%			770	33.3		
		30%			481	53.3		
	200	20%			1,424	18.0		
		25%			902	28.4		
		30%			563	45.5		

\*Insufficient burner BTUs for 45 deg. ambient temp. Est. at ambient temp 45 deg. F, rel.humidity 65% 1/4 cfm cooling  
 Use only as a guide, conditions will vary capacities.

**Shelled Corn  
(Metric Measurements)**

AUTOFLOW SERIES			6.40m Dia. 1-Fan		7.32m Dia. 1-Fan		9.14m Dia. 1-Fan	
FAN & HEATER Unit(s)	Plenum Temp. C°	Moisture Content Wet Basis	Minutes Between Dumps		Minutes Between Dumps		Minutes Between Dumps	
			MT / hr	Dumps	MT / hr	Dumps	MT / hr	Dumps
11.19 kW 91.44 cm  1.125 Million kCal	71	20%	12.7	17.4	13.4	21.6	14.1	31.9
		25%	8.0	27.6	8.5	34.1	9.0	50.4
		30%	5.0	44.2	5.3	54.6	5.6	80.8
	82	20%	16.2	13.6	17.1	* 16.8	18.1	* 24.9
		25%	10.3	21.5	10.9	* 26.6	11.5	* 39.4
		30%	6.4	34.5	6.8	* 42.6	7.2	* 63.1
	93	20%	19.0	* 11.6	20.1	* 14.4	21.2	* 21.3
		25%	12.0	* 18.4	12.7	* 22.7	13.4	* 33.6
		30%	7.5	* 29.5	8.0	* 36.4	8.4	* 53.9
11.19 kW 101.60 cm  1.5 Million kCal	71	20%	14.8	14.9	16.5	17.5	18.1	25.0
		25%	9.4	23.5	10.4	27.7	11.4	39.5
		30%	5.9	37.7	6.5	44.4	7.1	63.3
	82	20%	19.0	11.6	* 21.1	* 13.7	* 23.1	* 19.5
		25%	12.0	18.4	* 13.3	* 21.6	* 14.6	* 30.9
		30%	7.5	29.5	* 8.3	* 34.7	* 9.1	* 49.5
	93	20%	* 22.2	* 9.9	* 24.7	* 11.7	* 27.1	* 16.7
		25%	* 14.1	* 15.7	* 15.6	* 18.5	* 17.1	* 26.4
		30%	* 8.8	* 25.2	* 9.8	* 29.6	* 10.7	* 42.2
22.37 kW 106.68 cm  2.5 Million kCal	71	20%			18.8	15.4	20.5	22.0
		25%			11.9	24.3	13.0	34.8
		30%			7.4	38.9	8.1	55.8
	82	20%			21.1	12.0	26.2	17.2
		25%			15.2	19.0	16.6	27.2
		30%			9.5	30.4	10.4	43.6
	93	20%			28.2	10.2	30.7	14.7
		25%			17.8	16.2	19.4	23.2
		30%			11.2	25.9	12.1	37.2
29.83 kW 106.68 cm  2.5 Million kCal	71	20%					23.4	19.3
		25%					14.8	30.5
		30%					9.2	48.9
	82	20%					29.9	15.1
		25%					18.9	23.8
		30%					11.8	38.2
	93	20%					35.0	12.9
		25%					22.2	20.3
		30%					13.8	32.6

Insufficient burner BTUs for 7 deg. C ambient temp.  
Ratings exclude loading time.

Est. at ambient temp 7 deg. C, rel. humidity 65%.  
Use only as a guide, conditions will vary capacities.

1/4 CFM/bu cooling rate.

**Shelled Corn**  
(Metric Measurements)

AUTOFLOW SERIES			9.14m Dia. 2- Fan		10.97m Dia. 1-Fan		10.97m Dia. 2-Fan	
FAN & HEATER Unit(s)	Plenum Temp. C°	Moisture Content Wet Basis	Minutes Between		Minutes Between		Minutes Between	
			MT / hr	Dumps	MT / hr	Dumps	MT / hr	Dumps
11.19 kW 91.44 cm	71	20%	23.9	18.9			25.2	25.8
		25%	15.1	29.9			16.0	40.7
		30%	9.4	47.9			10.0	65.2
1.125 Million kCal	82	20%	30.5	14.8			32.3	20.1
		25%	19.3	23.4			20.4	31.8
		30%	12.1	37.4			12.8	51.0
	93	20%	35.7	* 12.6			37.8	* 17.2
		25%	22.6	* 19.9			24.0	* 27.2
		30%	14.1	* 32.0			15.0	* 43.5
11.19 kW 101.60 cm	71	20%	29.3	15.4			32.2	20.2
		25%	18.6	24.3			20.4	31.9
		30%	11.6	39.0			12.8	51.1
1.5 Million kCal	82	20%	37.5	12.0			41.2	15.8
		25%	23.8	19.0			26.1	24.9
		30%	17.8	30.4			16.3	39.9
	93	20%	* 43.9	* 10.2			* 48.3	* 13.4
		25%	* 27.8	* 16.2			* 30.6	* 21.3
		30%	* 17.4	* 26			* 19.1	* 34.1
22.37 kW 106.68 cm	71	20%			20.8	31.3	36.9	17.6
		25%			13.2	49.4	23.4	27.8
		30%			8.2	79.1	14.6	44.6
2.5 Million kCal	82	20%			26.6	24.4	47.2	13.8
		25%			16.9	38.6	29.9	21.7
		30%			10.5	61.8	18.7	34.8
	93	20%			31.2	20.8	55.3	11.7
		25%			19.7	32.9	35.0	18.6
		30%			12.3	52.8	21.9	29.8
29.83 kW 106.68 cm	71	20%			24.1	26.9		
		25%			15.3	42.6		
		30%			9.6	68.2		
2.5 Million kCal	82	20%			30.9	21.0		
		25%			19.6	33.3		
		30%			12.2	53.3		
	93	20%			36.2	18.0		
		25%			22.9	28.4		
		30%			14.3	45.5		

Insufficient burner BTUs for 7 deg. C ambient temp.  
Ratings exclude loading time.

Est. at ambient temp 7 deg. C, rel.humidity 65%.  
Use only as a guide, conditions will vary capacities.

1/4 CFM/bu cooling rate.







## Limited Warranty

The GSI Group, LLC. ("GSI") warrants products which it manufactures to be free of defects in materials and workmanship under normal usage and conditions for a period of 12 months after sale to the original end-user or if a foreign sale, 14 months from arrival at port of discharge, whichever is earlier. The end-user's sole remedy (and GSI's only obligation) is to repair or replace, at GSI's option and expense, products that in GSI's judgment, contain a material defect in materials or workmanship. Expenses incurred by or on behalf of the end-user without prior written authorization from the GSI Warranty Group shall be the sole responsibility of the end-user.

**Warranty Extensions:** The Limited Warranty period is extended for the following products:

	Product	Warranty Period
<b>AP Fans and Flooring</b>	Performer Series Direct Drive Fan Motor	3 Years
	All Fiberglass Housings	Lifetime
	All Fiberglass Propellers	Lifetime
<b>Cumberland Feeding/Watering Systems</b>	Feeder System Pan Assemblies	5 Years **
	Feed Tubes (1.75" & 2.00")	10 Years *
	Centerless Augers	10 Years *
	Watering Nipples	10 Years *
<b>Grain Systems</b>	Grain Bin Structural Design	5 Years
<b>Grain Systems Farm Fans Zimmerman</b>	Portable & Tower Dryers	2 Years
	Portable & Tower Dryer Frames and Internal Infrastructure †	5 Years

\* Warranty prorated from list price:  
 0 to 3 years – no cost to end-user  
 3 to 5 years – end-user pays 25%  
 5 to 7 years – end-user pays 50%  
 7 to 10 years – end user pays 75%

\*\* Warranty prorated from list price:  
 0 to 3 years – no cost to end-user  
 3 to 5 years – end-user pays 50%

† Motors, burner components and moving parts not included. Portable Dryer screens included. Tower Dryer screens not included.

GSI further warrants that the portable and tower dryer frame and basket, excluding all auger and auger drive components, shall be free from defects in materials for a period of time beginning on the twelfth (12<sup>th</sup>) month from the date of purchase and continuing until the sixtieth (60<sup>th</sup>) month from the date of purchase (extended warranty period). During the extended warranty period, GSI will replace the frame or basket components that prove to be defective under normal conditions of use without charge, excluding the labor, transportation, and/or shipping costs incurred in the performance of this extended warranty.

### Conditions and Limitations:

THERE ARE NO WARRANTIES THAT EXTEND BEYOND THE LIMITED WARRANTY DESCRIPTION SET FORTH ABOVE. SPECIFICALLY, GSI MAKES NO FURTHER WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE IN CONNECTION WITH: (i) PRODUCT MANUFACTURED OR SOLD BY GSI OR (ii) ANY ADVICE, INSTRUCTION, RECOMMENDATION OR SUGGESTION PROVIDED BY AN AGENT, REPRESENTATIVE OR EMPLOYEE OF GSI REGARDING OR RELATED TO THE CONFIGURATION, INSTALLATION, LAYOUT, SUITABILITY FOR A PARTICULAR PURPOSE, OR DESIGN OF SUCH PRODUCTS.

GSI shall not be liable for any direct, indirect, incidental or consequential damages, including, without limitation, loss of anticipated profits or benefits. The sole and exclusive remedy is set forth in the Limited Warranty, which shall not exceed the amount paid for the product purchased. This warranty is not transferable and applies only to the original end-user. GSI shall have no obligation or responsibility for any representations or warranties made by or on behalf of any dealer, agent or distributor.

GSI assumes no responsibility for claims resulting from construction defects or unauthorized modifications to products which it manufactured. Modifications to products not specifically delineated in the manual accompanying the equipment at initial sale will void the Limited Warranty.

This Limited Warranty shall not extend to products or parts which have been damaged by negligent use, misuse, alteration, accident or which have been improperly/inadequately maintained. This Limited Warranty extends solely to products manufactured by GSI.

Prior to installation, the end-user has the responsibility to comply with federal, state and local codes which apply to the location and installation of products manufactured or sold by GSI.



a division of

---

**THE GSI GROUP**

---



1004 E. Illinois St.  
Assumption, IL 62510  
Phone 217-226-4421  
Fax 217-226-4498

April 2004